

9-22-00

A

The Law Offices of  
**STRAUB & POKOTYLO**

Michael P. Straub  
mike@sp-ip.com

John C. Pokotylo  
john@sp-ip.com

1 Bethany Road  
Suite 83, Bldg. 6  
Hazlet, NJ 07730

Telephone: 732-335-1222  
Facsimile: 732-335-1228  
Internet Site: www.sp-ip.com

September 21, 2000

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER**

Assistant Commissioner of Patents  
Box Patent Application  
Washington, D.C. 20231

Sir:

Enclosed herewith for filing is the following  
**utility patent application:**

Attorney Docket No.: **Bell-5/CIP2**

Applicant: **Jacob Needle**

Title: **"METHODS AND APPARATUS FOR GENERATING LOCAL  
OSCILLATION SIGNALS"**

**PATENT APPLICATION FILING FEE CALCULATION**

	<u>No. Filed</u>	<u>Less</u>	<u>Rate/Claim</u>	<u>Fee</u>
Total Claims	<u>37</u>	-20	17 x \$18.00	\$ 306.00
Independent Claims	<u>6</u>	-3	3 x \$78.00	\$ 234.00
			Minimum Filing Fee	\$ 690.00
			Multiple Dependency Fee (if applicable - \$260.00)	\$ 00.00
			50% Reduction for Small Entity (Independent Inventor, Non-profit Corporation, or Small Business Concern) - appropriate verified statement attached	\$- 00.00
			TOTAL FILING FEE	\$1,230.00
			ASSIGNMENT RECORDATION	\$ 40.00
			<b>TOTAL FEES ENCLOSED</b>	<b>\$1,270.00</b>

jc613 U.S. PTO  
09/21/00

jc542 U.S. PTO  
09/667419  
09/21/00

09667419 09/21/00

- ☒ Specification: 51 Total Pages (including claims and abstract)
- ☒ Drawing(s): 11 Total Sheets (FIGs. 1-11)

Also enclosed herewith for filing in connection with the enclosed application are:

- ☒ Our check in the amount of \$1,270.00 (the total filing fee) is enclosed herewith. If this check is unacceptable, insufficient or omitted, kindly charge the entire or additional filing fee, as appropriate, to the deposit account of **Straub & Pokotylo**, deposit account number **50-1049**. To facilitate that charge, a duplicate copy of this letter is enclosed herewith.
- ☒ Postcard Receipt;
- ☐ Preliminary Amendment;
- ☒ Oath or Declaration:  
☒ Newly executed on September 14, 2000;  
☐ Copy from a prior application (36 C.F.R. § 1.63(d));
- ☒ Assignment Papers to: Bell Atlantic Network Services, Inc.;
- ☐ Information Disclosure Statement, modified PTO-1449, and (0) cited reference(s);
- ☐ Letter referencing previously filed disclosure document; number \_\_\_\_\_ filed \_\_\_\_\_;
- ☐ Verified Statement Claiming Small Entity Status:  
☐ Newly executed on \_\_\_\_\_;  
☐ Copy from a prior application, status still proper and desired;
- ☐ Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b);
- ☐ Microfiche Computer Program (Appendix);
- ☐ English translation document;


004220-6749960

☐ Submission of a Priority Document, a certified copy of a \_\_\_\_\_ patent application or inventor's certificate, filed \_\_\_\_\_ and assigned serial no. \_\_\_\_\_, upon which a claim to priority is made; and

☐ Other: \_\_\_\_\_

Respectfully submitted,

STRAUB & POKOTYLO

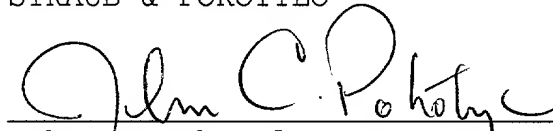


John C. Pokotylo, Attorney  
Reg. No. 36,242  
Customer No. IDON601137  
(732) 335-1222

STRAUB & POKOTYLO  
1 Bethany Road  
Suite 83, Building 6  
Hazlet, New Jersey 07730

\*\*\*EXPRESS MAIL CERTIFICATION\*\*\*

"Express Mail" mailing label number: EK950294182US  
Date of deposit: September 21, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and is addressed to the Assistant Commissioner of Patents, **Box Patent Application**, Washington, D.C. 20231.

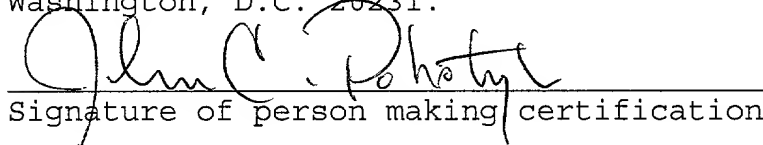

Signature of person making certification

John C. Pokotylo  
Name of person making certification

(Bell-5/CIP2)

**METHODS AND APPARATUS FOR GENERATING  
LOCAL OSCILLATION SIGNALS**

5     RELATED APPLICATIONS

10           This application is a continuation-in-part of  
U.S. Patent Application Serial No. 09/283,400, filed on  
April 1, 1999 and entitled "Multimedia Distribution  
System Using Fiber Optic Lines" which is a  
continuation-in-part of U.S. Patent Application Serial  
No. 08/806,090, issued as U.S. Patent No. 6,055,077 on  
April 25, 2000 and entitled "Multimedia Distribution  
System Using Fiber Optic Lines". Each of these  
15     applications and the patent are incorporated herein by  
reference and priority is claimed to these applications  
under 35 U.S.C. § 120.

FIELD OF THE INVENTION

20           The present invention concerns generating local  
oscillator signals which may be used in a multimedia  
system (disclosed in the "related applications" referred  
above) which distributes information from a central  
location, such as a central station or central office for  
25     example, to one or more subscribers, and in particular, a  
switchable system which selectively distributes  
information to each of the subscribers from the central  
location.

Express Mail No. EK950294182US

## Background of the Invention

With increasing bandwidths available on fiber optic communication paths, information providers can now deliver a broader range of information, e.g., high definition video, to a subscriber premises. However, even with advancements in optical fiber telecommunication technology, theft of services remains a growing concern among information providers (e.g., cable television service providers). The problem involves the fact that once a central station distributes signals in a general manner to a subscriber premises, the central station loses control of the signals. As a result, such signals are exposed to theft which results in lost revenue.

Presently, one approach to remedy the service theft problem is to transmit scrambled signals or channels to each subscriber's premises. Each subscriber premises is equipped with a smart set top box to descramble those signals or channels ordered by the subscriber. Such systems however require additional equipment, specifically scramblers and descramblers, which increases their overall cost. Moreover, intelligent set top boxes that permit theft of services are presently available on the black market. Such set top boxes can descramble all scrambled signals transmitted to the subscriber premises, thereby allowing the subscriber access to those signals or channels.

Another approach to remedy the service theft problem is found in U.S. Patent No. 4,994,909 (hereafter referred to as "the Graves patent"). The Graves patent provides a video signal distribution system (hereafter "the Graves system") that includes a services switching device and an optical network interface (ONI) for selecting particular signals for delivery to a subscriber. The services switching device employs multiplexers for producing time-division multiplexed (TDM) signals. Because the processing and routing of TDM signals is typically accomplished utilizing electronics, a drawback of the Graves system is a need for optical-to-electrical and electrical-to-optical conversions and for controlled environmental vaults, power back-ups and maintenance.

Another multi/demultiplexing technique that employs optical rather than electrical multiplexing, is wavelength division multiplexing (WDM). WDM provides significant advantages over TDM. Specifically, wavelength multiplexed channels can be separated and combined passively, independent of the format and bit rate of the data being transferred. An example of a fiber optic subscriber loop architecture utilizing WDMs is found in U.S. Patent No. 5,221,983 (hereafter referred to as "the Wagner patent"). However, such subscriber-type systems employing WDMs neither provide nor suggest any mechanism for selecting particular signals for delivery to a subscriber premises.

Accordingly, it is an object of the system  
(disclosed in the "related applications" referenced above)  
in which the present invention may be used, to provide a  
fiber optic subscriber loop architecture, based on WDM  
5 techniques, which can selectively transmit only those bands  
ordered by the subscriber to the subscriber premises.

A further object of the system (disclosed in the  
"related applications" referenced above) in which the  
10 present invention may be used, is to eliminate the need for  
scramblers and descramblers at the subscriber premises and,  
thus, reduce the overall cost of the system.

Another object of the system (disclosed in the  
"related applications" referenced above) in which the  
present invention may be used, is to prevent theft of  
information services.

Besides the aforementioned shortcomings and  
20 limitations of the prior art, the system (disclosed in the  
"related applications" referenced above) in which the  
present invention may be used also overcomes limitations  
and deficiencies relating to wideband transmission to the  
subscriber premises, especially wideband digital services.  
25 In providing these services, the information destined for  
the subscribers is digitally encoded, typically using the  
MPEG or MPEG-2 (Moving Pictures Experts Group) standards,  
and propagate as a digital stream over the transmission  
medium. (Digital encoding (or compression) is deployed to  
30 effectively utilize the bandwidth of the communications

medium.) If front-end encoding is used, the receiver at each customer premises requires digital decoder to reconstruct the original information. Moreover, if two-way or bi-directional communication is desired, then the equipment at the customer premises may be arranged with a digital encoder. The decoding/encoding required by the customer's equipment is expensive. Moreover, it is virtually impossible with such an arrangement to deliver tailored services, that is, subscriber-dependent services, to each individual subscriber.

To overcome the limitations of encoded digital propagation, some recently devised systems focus on non-encoding propagation so that that subscriber's TV may be used in the conventional manner to receive the transmitted signals. Representative of such technology using a single-fiber for a transmission medium is a system for propagating a plurality of downstream video channels over the single fiber in combination with two-way interactive telephony communications over the same fiber, as disclosed in the article, H. Ogura et al, "Launch of 'CATV Video Distribution Service' over FTTH", NTT Review, Vol. 9, No. 6 (November 1997) (hereafter referred to as "the Ogura article"). As described in the Ogura article, two or more communications channels are delivered over a single optical fiber from a head-end to a subscriber's home to effect fiber-to-the-home (FTTH) service. In general, the design philosophy for the system discussed in the Ogura article (hereafter referred to as "the Ogura system") is one of the separating downstream video from interactive,



non-video communications; that is, propagating the downstream video at one wavelength (namely, 1.5 micrometers) and the interactive telephony communications at the second wavelength (namely, 1.3 micrometers).

5 Moreover, this bi-directional telephony arrangement uses TCM (time compression multiplexing) in the so-called "ping-pong" communication mode, wherein all downstream receivers detect the same signal, and each upstream communication from a given subscriber is assigned a unique  
10 time slot.

In particular, in the Ogura system, connections from the head-end to each of the customers fans-out. Consequently, every customer receives the same downstream signal broadcast from the head-end. That is, there is no ability to deliver to a given subscriber selected ones of the video channels composing the propagated downstream signal. Such an arrangement is typically referred to as a "tree-and-branch" delivery system. Consequently, there is  
20 the potential for theft of the services as alluded to above. In addition, to derive the signal for the subscriber, a number of signal splitters are deployed. Consequently, the signal delivered to front-end of the cascade of splitters must have a high power level. This is  
25 disadvantageous since high power components tend to be more costly.

Moreover, the Ogura system was designed to be implemented on already existing 1.3 micrometer  
30 zero-dispersion fibers to reduce implementation costs, but

the downstream video utilizes the 1.5 micrometer wavelength for propagation. When a 1.5 micrometer optical wavelength is transmitted through a 1.3 micrometer zero-dispersion fiber, fiber dispersion induces a degradation with a concomitant deterioration in signal (e.g., video signal) quality. Consequently, the Ogura system must be arranged with dispersion compensation, which adds to its complexity and cost.

Also, the types of interactive services taught or suggested by the Ogura article are existing services such as plain old telephone service (POTS) and narrowband ISDN. There is no teaching or suggestion of using the interactive services part of the Ogura system (1.3 micrometer wavelength) for video, especially video conferencing, or wideband data. In brief, the Ogura system separates video (downstream at 1.5 micrometers) from telephony (upstream and downstream at 1.3 micrometers) using a tree-and-branch delivery system for downstream transmission. This is in contrast to the present inventive subject matter, wherein the wavelength assignments are characterized as separating downstream from upstream, irrespective of the content of the downstream or upstream signals, and the system is arranged as a "star-delivery" system.

Still another object of the system (disclosed in the "related applications" referenced above) in which the present invention may be used is, to house environmentally sensitive components in well-controlled environments such as a central office or a customer's premises.

Yet another object of the system (disclosed in the "related applications" referenced above) in which the present invention may be used to provide "star-delivery" system between the central location and each customers premises.

#### SUMMARY OF THE INVENTION

The above-mentioned shortcomings as well as other limitations and deficiencies are obviated, by a system (disclosed in the "related applications" referenced above) which utilizes a dedicated fiber optic cable interconnecting a customer's premises to a central location to propagate a downstream optical signal derived from a plurality of signals, either electrical or optical depending upon the embodiment, that are switched at the central location, the signal(s) selected being only that signal(s) subscribed to by the customer.

Briefly, the system (disclosed in the "related applications" referenced above) for communicating between each particular customer and the central location over the dedicated fiber may include: (a) an electrical switch, at the central location, for selecting only that signal (those signals) subscribed to by each subscriber, the electrical switch operating in response to control signals available at the central location; (b) an electrical-to-optical converter to generate an optical downstream signal from the selected electrical signal(s) for propagation over the

single fiber; and (c) an optical-to-electrical converter for converting the downstream optical signal, delivered by the single fiber, to received versions of the original electrical signals.

5

Moreover, bi-directional communications may be effected by further arranging the system for transmitting second electrical signal(s) between the central location and the customer's premises, the electrical-to-optical converter being adapted for receiving the second electrical signal(s) at its input and for changing the downstream optical signal in correspondence to the second electrical signal(s), and the optical-to-electrical converter being adapted for converting the detected downstream optical signal into second electrical received versions of the second electrical signal(s) for use by the customer. For upstream communication to complete the bi-directional operational mode, the system may be arranged with an upstream electrical-to-optical converter, at the customer premises, for converting a third electrical signal(s) into an upstream optical signal, and for transmitting the upstream optical signal over the optical fiber at a second optical wavelength, and wherein the central location further includes an upstream optical-to-electrical converter for detecting the upstream optical signal and for converting the upstream optical signal to detected electrical versions of the third electrical signal(s). Typically the third electrical signal(s) is the counterpart to the second electrical signal(s) which, when paired, effect the bi-directional communication mode.

5 The system (disclosed in the "related applications" referenced above) in which the present invention may be used provides an improved fiber optic subscriber loop architecture which reduces the overall cost of the system and prevents theft of services. Such a system selectively transmits only information ordered by the subscriber to the subscriber premises and, thus, eliminates the need for scramblers (at the central office or network node) and descramblers (at the subscriber premises). This results in a reduction in equipment and cost of the overall system. Such an arrangement also prevents unauthorized use or access (i.e., theft) of information services by a subscriber premises.

10 In the systems (disclosed in the "related applications" referenced above), each of the selected signals may be mixed with a particular modulation signal of a particular frequency. These mixed selected signals may then be combined before being converted into an optical signal. It is an object of the present invention to generate local oscillator signals (e.g., signals generated by an oscillator) with which the selected signals may be mixed for upstream and downstream conversions. The present invention may generate such oscillator signals by dividing a pilot tone, such as an approximately 120 MHz pilot tone found on many cable TV systems. Oscillator signals for demodulating received selected signals may be similarly generated. Generating such oscillator signals in this way minimizes or eliminates unwanted "beat" frequencies, is

relatively inexpensive to implement, minimizes phase noise and minimizes the complexity and number of components required for local oscillator circuitry.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a fiber optic subscriber "loop" system with a central office that cooperates with a plurality of network nodes to provide selected information services to a plurality of subscriber premises.

FIG. 2 is a block diagram of a central office in which the present invention may be used.

FIG. 3 is a block diagram of a network node which may be used in the system of FIG 1.

FIG. 4 is a block diagram of a subscriber premises in which the present invention may be used.

FIG. 5 is a high-level block diagram of an illustrative system for an individual subscriber wherein electrical signals are switched and then processed to compose the optically transmitted signals.

FIG. 6 depicts the frequency domain assignments for the downstream and upstream electrical signals.

FIG. 7 is a high-level block diagram of an illustrative system for a plurality of subscribers each having the central office portion of the arrangement depicted in FIG. 5.

FIG. 8 is a block diagram of the central office receiver portion of the system show in FIG. 5.

FIG. 9 is a block diagram of an embodiment for transmitting data from a central office to a subscriber which employs the local oscillator signal generation technique of the present invention.

FIG. 10 is a block diagram of an embodiment for transmitting data from a subscriber to a central office which employs the local oscillator signal generation technique of the present invention.

FIG. 11 illustrates frequencies of local oscillators used in upstream and downstream communications.

#### DETAILED DESCRIPTION

##### 1. Switching of Optical Signals

FIG. 1 is a block diagram of an information distribution system 10. Information distribution system 10 includes a central office 12 which is connected by fiber optic feeder cable 14 to a plurality of network nodes (NN)

16-1, 16-2, ... etc. Each network node 16-1, 16-2 is connected by a fiber optic line 18 to a corresponding subscriber premises 20-1, 20-2. As shown in FIG. 1, each network node 16-1, 16-2 is positioned exterior to a corresponding subscriber premises 20-1, 20-2.

At central office 12, a full band of downstream information, comprising six optical bands 01 through 06, is transmitted to each network node 16-1, 16-2 via fiber optic cables 14. Each network node 16-1, 16-2 selects a subset of bands 01 through 06 to which its respective subscriber premises 20-1, 20-2 is entitled (i.e., selects only those channels ordered by the subscriber). Such selected bands are then combined and transmitted to the corresponding subscriber premises 20-1, 20-2, across a single fiber optic line 18.

FIG. 2 shows a block diagram of central office 12 where electrical signals are converted to optical signals using laser transmitters, i.e., laser diodes, for light sources in the central-to-remote direction. Laser transmitters offer the linear performance characteristic required for the transmission of analog color signals and a higher frequency response than alternative LED light sources. Each laser transmitter generates a carrier wavelength corresponding to a different color. Signals are then modulated onto different carrier wavelengths for downstream transmission. Such modulation methods are commonly understood in the art and will not be discussed in further detail herein.



In one embodiment of information distribution system 10, central office 12 employs a full band from 5 MHz to 1000 MHz, which is divided into six optical bands 01 through 06, for transmitting downstream information to each network node 16 (FIG. 1). The electrical signals from each band are converted into optical signals, 01 through 06, by modulating six laser transmitters LT1 through LT6 at different wavelengths corresponding to different colors. After downstream information is modulated onto optical bands 01 through 06, the optical bands are then transmitted to each network node 16 (FIG. 1), via optic feeder cables 14.

The nature and purpose of each optical band, 01 through 06, is described herein (FIG. 2). Specifically, optical band 01 comprises the frequency domain of 5 MHz to 35-to-45 MHz and is preferably utilized for bi-directional data communication between central office 12 and premises 20. Optical bands 02 through 06 carry audio/video information for use by a television receiver, located at subscribers premises 20. Optical band 02, having a bandwidth of 144 MHz, carries information corresponding to channels 2 through 25; optical band 03, having a bandwidth of 150 MHz, carries downstream information corresponding to channels 26 to 50; optical band 04, having a bandwidth of 150 MHz, carries downstream information corresponding to channels 51 through 75; optical band 05, having a bandwidth of 150 MHz, carries downstream information corresponding to channels 76 to 100; and optical band 06, having bandwidth

of 150 MHz, carries downstream information corresponding to channels 101 to 125. Although information distribution system 10 utilizes six optical bands for transmitting downstream information, any number of optical bands or any bandwidth may be utilized as desired. For instance, eight, sixteen and thirty-two optical bands are typically employed in the industry for downstream transmission.

FIG. 3 illustrates a network node 16 which includes an optical switch matrix 39 having optical switches 40-1 through 40-6 corresponding to optical bands 01 through 06. Optical bands 01 through 06 are received by network node 16, via optical cable feeder 14, and are respectively coupled to optical switches 40-1 through 40-6. Optical switches 40-1 through 40-6 can be controlled by electrical control signals to select or deselect any optical band 01 through 06 (via optical switches 40-1 through 40-6) destined for subscriber premises 20.

Optical switches 40-1 through 40-6 can be controlled from a remote location, i.e., central office 12, or preprogrammed to select or de-select any optical band 01 through 06 destined for subscriber premises 20. Such an arrangement can be accomplished in the following manner. Each network node 16 may include a microprocessor-based control unit 46 which is either pre-programmed with the subscriber's order or receives selection signals 48 (i.e., codes) from central office 12. Selection signals 48 may be received via telephone line, radio frequency (RF) or fiber optic cables 14. Upon receipt of selection signals 48,

control unit 46, utilizing a digital-to-voltage (D/V) converter, generates electrical switch control signals 44 in accord with selection signals 48. Optical switch matrix 39 receives electrical control signals 44 and initiates the completion of the requested optical path connection, thus allowing only those optical bands ordered by subscriber premises 20 to be transmitted to subscriber premises 20.

Network node 16 further includes a wavelength division multiplexer (WDM) 42 which receives the selected optical bands (i.e., a subset of 01 through 06) from optical switch matrix 39. WDM 42 combines the selected optical bands into a single optical signal which is then transmitted across fiber optic line 18 to respective subscriber premises 20.

It is important to understand that network node 16 is positioned exterior to subscriber premises 20 (and not at subscriber premises 20) to prevent theft of services at subscriber premises 20. Network node 16 can be either mounted and installed at central office 12 or on a pole, vault or in a node configuration near subscriber premises 20. As can be appreciated by those skilled in the art, the switching function provided by network node 16 allows central office 12 to maintain control over downstream information (i.e., 01 through 06) by transmitting only those bands ordered by subscriber premises 20 to subscriber premises 20. Network node 16 eliminates the need for scramblers and descramblers at central office 12 and subscriber premises 20 and, thus, reduces the overall cost

of the system. Such a system also prevents subscriber premises 20 from utilizing a black market set top box (i.e., an intelligent set top with descrambling capabilities) to steal information services.

5

As illustrated in FIG. 4, subscriber premises 20 has a set top box 50 which receives the single optical signal (i.e., selected downstream information) from respective network node 16, via fiber optic line 18. Set top box 50 includes a Wavelength Division Demultiplexer (WDD) 62 and a plurality of low bandwidth Optical/Electrical (O/E) converters.

10

15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995

WDD 62, coupled to fiber optic line 18, is utilized to separate optical bands 02 through 06. WDD 62 receives the single optical signal and separates it back into the selected optical bands, in particular, a subset of optical bands 02 through 06. Each selected optical band is then converted into an RF signal, by a corresponding low bandwidth O/E converter 64.

20

WDD 62 is also utilized to separate optical band 01 (i.e., 5 to 35-to-45 MHz BB data) from the single optical signal. As previously mentioned, optical band 01 is preferably utilized for both upstream and downstream data transmission between central office 12 and subscriber premises 20. Such an arrangement can be accomplished by having optical band 01 include both modulated and unmodulated wavelengths. The modulated wavelengths carry downstream information from central office 12 to subscriber

25

30

premises 20; and the unmodulated wavelengths are utilized at subscriber 20 to transmit upstream information to central office 12. Subscriber premises 20 includes a laser transmitter 70 for modulating upstream information onto unmodulated wavelengths of optical band 01. Such a two-way data link can be utilized by a computer, fax machine, telephone, modem at subscriber 20.

It should be understood that, at subscriber premises 20, set top box 50 does not operate over the entire band, i.e., the single optical signal. That is to say, set top box 50 does not convert the entire single optical signal into RF. Instead, the components of the single optical signal are separated by WDD 62, and low bandwidth O/E converters 64, 68 are then employed to convert the selected bands into RF. Such an implementation reduces the overall cost of set top box 50 by eliminating the need to operate over the entire band at the same time. More importantly, such an arrangement allows information distribution system 10 to meet the required dynamic range and linearity specifications.

Instead of having a set top box for each television set at subscriber premises 20, set top box 50 can also be configured in the basement (or any other convenient location) of subscriber premises 20 to convert all delivered bands at once. The converted bands (i.e., channels) can then be transmitted to each television set in the clear, over cables. Such an arrangement eliminates the need for multiple set top boxes for those subscriber

premises having more than one television set and, thus, may decrease the overall cost of the equipment at those subscriber premises.

5      2.    Switching of Electrical Signals

10            The origin of the optical signals 01-06 in the description of the illustrative embodiment covered by FIGS. 1-4 was not presented in great detail except for the description with respect to FIG. 2, which indicated that electrical signals serve as inputs to a bank of lasers (LT1-LT6) and the electrical signals are converted to optical signals 01-06 using the laser bank.

15            Thus, whereas the foregoing description concentrated on the optical switching of optical signals 01-06 destined for each subscriber with a primary goal of preventing fraud, the illustrative embodiment of this section: (a) effects electrical switching of the original electrical signals which had impliedly been processed to produce optical signals 01-06; and (b) is configured so that sensitive components are located only in controlled environments, namely, the central office and/or the subscriber premises. Again, the goal of preventing fraud is realized.

20            However, the instant illustrative embodiment depicts a communication system arranged such that: (a) a dedicated fiber per subscriber is utilized, that is, each subscriber is connected to the central office with their

own fiber optic cable so as to implement a "star" distribution network (in contrast to a "tree-and-branch" distribution); (b) a pair of low-power lasers is deployed per subscriber in a duplex communication mode - one laser is located in the central office for downstream transmission, and another laser is located at the subscriber premises for upstream propagation; and (c) both broadband and narrowband signals are propagated in the downstream direction at a first light wavelength or color, and only narrowband signals are propagated in the upstream direction at a second light wavelength or color. Accordingly, the downstream and upstream communications are separated by the wavelength of light, in contrast to the other heretofore known systems whereby bi-directional, narrowband communication is effected over only one of the light wavelengths.

## 2.1 Central Office Location 110

With reference to FIG. 5, system 100 is shown in high-level block diagram form for a single subscriber. The elements of system 100 located in central office (CO) 110 include: (a) electrical switch 115 having electrical signals E2 - E6 as inputs; (b) CO radio frequency (RF) combiner 125 having inputs from switch 115 as well as four other exemplary electrical signal inputs referred to as 'video-D', 'narrowband-D', 'wideband-D', and 'telephony-D' (the 'D' designating transmission downstream); (c) laser 130 coupled to combiner 125; (d) passive wave division multiplexer/wave division demultiplexer (WDM/WDD) 135

coupled to laser 130 as one input, and to dedicated fiber 101 as both an input and output; and (e) CO receiver 140 coupled to WDM/WDD 135. Receiver 140 has five exemplary outputs referred to as 'video-U', 'narrowband-U',  
5 'wideband-U', 'telephony-U', and 'video conference-U' (the 'U' designating transmission upstream).

The electrical signals E2-E6 are, without loss of generality, those signals giving rise to optical signals  
10 O2-O6 discussed in the previous Section 1. From the preview section, the optical signals O1-O6 occupy a frequency band preferably from 5 MHz to 1000 MHz. For example, O2 conveys a 144 MHz frequency band corresponding to analog video channels 2 through 25; thereafter, each of the other bands O3-O6 occupies a 150 MHz band and conveys  
15 corresponding channels in blocks of 25. Finally, the optical signal O1 is used for the downstream component of bi-directional data and occupies the frequency band for 5 to 35-to-45 MHz. A summary of the frequency allocations  
20 for optical signals O1-O6 is shown in FIG. 6 for the downstream direction.

In general, each optical signal O1-O6 is derived from a corresponding set of electrical signals. For  
25 example, O2 is generated from an originating set of electrical signals referred to as E2, and the corresponding electrical signals composing E2 are twenty-four multiplexed signals for channel 2, channel 3, ..., channel 25 where each channel occupies a 6 MHz band; similar originating  
30 electrical signals E3-E6 correspond to optical signals



03-06. Electrical switch 115 is interposed for the purpose of delivering the combiner 125 only those channels subscribed to/desired by the particular downstream subscriber located at subscriber premises 150. For instance, if the customer at premises 150 only subscribes to the optical signals comprising 02 and 06, then switch 115 is closed to connect only E2 and E6 to combiner 125 (shown by closure points 115-A and 115-B of switch 115). Control of switch 115 is effected by controller 120, that is, as we discussed with respect to FIG. 3, selection signals are provided by CO 110 to controller 120 based upon the latest choice of service by the subscriber.

To reiterate, optical channel signal 01 typically is composed of the frequency band from 5 MHz up to 35-to-45 MHz, and is preferably used for the downstream component of bi-directional communications -- such as video conferencing, wideband data (e.g., 10 Mbs), narrowband data (e.g., ISDN and ADSL), and multi-channel telephony. In system 100, the electrical signals used to generate 01 have now been shown separately as the electrical signals 'video conferencing-D', 'narrowband-D', 'wideband-D', and 'telephony-D', appearing on paths 141-144, respectively. Whereas E2-E6 are one-way signals intended for wide distribution to numerous subscribers, the downstream electrical signals on paths 141-144 generally, when paired with the upstream signals shown on paths 146-148 in FIG. 5, are bi-directional as well as subscriber-dependent, that is, these electrical signals are associated with a

particular subscriber, so these signals are not switched by a switch as are signals E2-E6 by switch 115.

RF combiner 125 functions as a frequency-division combiner which sums the modulated components of the various electrical signals into pre-defined frequency bands shown in FIG. 6. For instance, E3, composed of analog video channels 26 and 50 having a total bandwidth 150 MHz, is modulated to occupy a band of frequencies from 194 to 344 MHz. As another example, E6, composed of digital video channels occupying a total bandwidth of 150 MHz, is modulated to the high end of the overall bandwidth, that is, between 850 to 1000 MHz. On the other hand, for instance, 'telephony-D' may be composed of 6 telephone-like analog, vestigial sideband (VSB) modulated signals each having a 1 MHz bandwidth located, e.g., between 20-26 MHz, by the modulator functionally of combiner 125. Combiner 125 delivers a single modulated electrical output signal, composed of frequency-shifted baseband signals shown in the top-half of FIG. 6, on path 126 to laser 130. In turn, the single electrical signal on path 126 is used to modulate the optical output of laser 130, having an optical wavelength nominally 1310 nm for the preferred embodiment, to thereby generate a modulated optical output signal on path 131 emanating from laser 130. The modulated optical output signal on path 131 is delivered to WDM/WDD 135 for propagation over fiber 101 to subscriber premises 150.

It can also be readily contemplated that it is possible to further subdivide the electrical composite

signals E2-E6 into their constituent parts, so that if E2 is composed of electrical signals denoted E2(1), E2(2), ..., E2(24) corresponding to 24 analog video channels, then each E2(i), i = 1, 2, ..., 24, could serve as an input to switch 115. Each E2(i) is a baseband signal, and combiner 125 positions each E2(i) to its assigned location in the RF bandwidth between 5 and 1000 MHz. Of course, switch 115 requires as many switching cross-points as there are individual electrical input signals in this realization; this is in contrast to the implementation shown in FIG. 5 wherein switch 115 requires only five cross-points.

## 2.2 Subscriber Premises 150

Again with reference to FIG. 5, the subscriber portion of system 100 located at subscriber premises 150, which could be implemented in a set-top box, includes: (a) passive WDM/WDD 155 which is coupled to dedicated optical fiber 101; (b) subscriber receiver 160 coupled to WDM/WDD 155; (c) subscriber RF combiner 170; and (d) transmitter laser 165 coupled to combiner 170 at its input and to WDM/WDD 155 as its output. Receiver 160 outputs the full video band containing E2-E6 originating at central office 110 on path 161 to a TV detector (not shown) of the subscriber's TV which detects the selected channels. Path 161 propagates E2-E6 as electrical signals located at juxtaposed frequency bands in the frequency domain as per the top-half of FIG. 6.

In addition, receiver 160 detects the signals used for bi-directional communication, namely, the counterparts to the signals appearing on paths 141-144 at CO 110; the counterparts are designated, as before, 'video-D', 'narrowband-D', 'wideband-D', and 'telephony-D' and appear on output paths 151-154, respectively. To recover the baseband version of these signals, receiver 150 includes a demodulator (discussed later) which converts the modulated signals (as produced by combiner 125 at CO 110) to baseband using standard demodulation techniques that are well-known in the art.

Five electrical signals for upstream communication, namely, 'video-U', 'narrowband-U', 'wideband-U', 'telephony-U', and 'video conferencing-U', appearing on paths 155-159, serve as inputs to subscriber RF combiner 170. The signals on paths 145-149 in CO 110 are the received counterparts of the signals originating on paths 155-159. The signals on paths 146-149 are the upstream components of the bi-directional communications effected by system 100, whereas the transmitted signal on path 155 and the received signal on corresponding path 145 conveyed only an upstream channel, such as 'Video-U' shown in FIG. 5. RF combiner 170 outputs a single electrical signal on path 167 to laser 165. The signal on path 166 serves as a modulation signal which modulates the intensity of laser 165 at the second, upstream light wavelength of, preferably, 1550 nm. The output of laser 165, on optical path 166, serves as an input to WDM/WDD 155, which signal is, in turn, propagated over fiber 101. The frequency

allocations for the bi-directional communication aspect of system 100 are also shown in bottom-half of FIG. 6 for the upstream direction; the upstream signals preferably occupy a band from 5 to about 200 MHz.

5

### 2.3 Central Office Arrangement to Serve a Plurality of Subscribers

Turning now to FIG. 7, there is shown illustrative front-end arrangement 200 located in the central office for serving a plurality of customers each arranged according to the central office portion of system 100 of FIG. 5. For instance, subscriber 1 is served by switching matrix 115-1, RF combiner 125-1, laser 130-1, WDM/WDD 135-1, receiver 140-1, controller 120-1, and fiber 101-1, which are the counterparts, respectively, of matrix 115, combiner 125, laser 130, WDM/WDD 135, receiver 140, controller 120, and fiber 101 of FIG. 5. Similarly, subscriber 2 is served by switching matrix 115-2, RF combiner 125-2, laser 130-2, WDM/WDD 135-2, receiver 140-2, controller 120-2, and fiber 101-2. In the realization of FIG. 7, the electrical signals E2-E6 are provided as inputs to every switching matrix 115-1, 115-2, ..., since E2-E6 must be accessible to every subscriber to satisfy service preferences.

25

Electrical signals on paths 141-1 through 144-1 are the counterparts to signals on paths 141 through 144 of FIG. 5, and similarly for the electrical signals on paths 141-2 through 144-2. The electrical signals on paths 141-1 through 144-1 are specific to subscriber 1, as the

30

electrical signals on paths 141-2 through 144-2 are specific to subscriber 2, so the subscriber-specific signals need not be passed through a switch array.

5 For completeness, the upstream electrical signals on paths 155-1 through 159-1 for subscriber 1 are the electrical counter parts to the signals on paths 155-159 for FIGS. 5, as are paths 155-2 through 159-2 for subscriber 2.

10 Finally, each subscriber of FIG. 7 (i.e., subscriber 1, subscriber 2, ..., subscriber N) is served at their premises by that portion of system 100 shown on subscriber premises 150 of FIG. 5.

## 2.4 Illustrative Embodiments of Subscriber and CO Receivers and Combiners

### 2.4.1 First Embodiment

20 Referring now to FIG. 8, there is shown a block diagram for central office receiver 140 of FIG. 5. In particular, receiver 140 includes: (a) PIN diode detector 310 coupled to WDM/WDD 135 via optical path 136 at port O and providing a multiplexed electrical output signal from port E to path 311, the multiplexed signal including the upstream communications signals 'video-U', ..., 'video-conference-U' appearing on paths 155-159 of FIG. 5; and (b) electrical demultiplexer 320 for converting the multiplexed signal on path 311 to individual baseband signals corresponding to 'video-U', ..., 'video

conference-U', respectively. Demultiplexer 320 is, illustratively, composed of a bank of demultiplexers (demux) 321-325, and a bank of filters 331-335 such that: demux 321 and filter 331 form a cascaded pair; demux 322 and filter 332 form another cascaded pair; and so forth. The function of each demux-filter pair is to frequency shift each passband signal to baseband. Of particular interest is the operation of demux 324/filter 334 pair -- since it is desirable to have a plurality of telephony paths, typically six independent paths, provided by system 100. If the signal on each telephony path is analog, then demux 324 is, itself, a bank of six demuxes wherein each demux in the bank demodulates the corresponding analog signal to baseband. To minimize the bandwidth of the analog signal, it may be preferable to transceive each telephony signal as an analog vestigial sideband (VSB) signal, so each demux converts a VSB signal to baseband. In this case, path 148 provides six parallel outputs, each corresponding to a baseband telephony signal. If the signal on each telephony path is digital, then it is necessary to interpose a D/A converter between path 311 and demux 324.

Subscriber receiver 160 is arranged in essentially the same manner as central office receiver 140 in that receiver 160 is composed of a PIN diode detector to convert the optical input signal from WDM/WDD 155 to an electrical signal, which signal in turn serves as the input to a bank of demux-filter pairs to thereby restore the

downstream communication signals 'video conferencing D', ..., 'telephony-D' to baseband.

#### 2.4.2 Second Embodiment

5 Recall from Figure 5 that data transmission may occur from the central office to a subscriber via a central office RF combiner 125 and a subscriber receiver 160. Similarly, data transmission may occur from the subscriber to the central office via a subscriber RF combiner 170 and central office receiver 140. Figures 9 and 10 illustrate exemplary embodiments which facilitate data transmission from the central office to the subscriber and from the subscriber to the central office, respectively.

10 In the following exemplary embodiment, it is assumed that the downstream optical wavelength is 1310 nm and the upstream optical wavelength is 1550 nm. In this way, the two streams can use the same fiber and yet be separated. The downstream (e.g., CATV) bandwidth may be provisioned as follows: the band from 54 MHz to 600 MHz for analog video and 600 MHz to 750 MHz for digital video. All of these channels may be combined in the RF domain utilizing cable TV channel combiners, which are commonly available in the CATV industry. The remaining two-way video conferencing, data communications, and telephony (POTS) may then be used to modulate carriers -- each occupying an RF channel in the 0 to 50 MHz band for the downstream direction and 0 to 70 MHz for the upstream direction. The system of the present invention can transmit an upstream bandwidth greater than 70 MHz, but



this is not necessary for this exemplary application.  
Single side band modulation may be used.

To generate a "carrier" wave (to be modulated by  
an information bearing signal, or to be used to demodulate  
a baseband signal to extract the information bearing  
signal), a local oscillator (LO) is provided for each  
"carrier". (Note that the term "carrier" is being loosely  
used here since an optical carrier wave is actually used to  
carry the information between the central office and the  
subscriber.) Unfortunately, however, high stability, low  
noise local oscillators are expensive and have a relatively  
large footprint (on a circuit board). One skilled in the  
art will appreciate that most amplitude modulated signals  
have the carrier frequency suppressed (and one of the two  
sidebands filtered out). If the carrier were not  
suppressed, energy would be wasted since the carrier  
frequency component carries no information. Unfortunately,  
however, suppressing the carrier makes subsequent  
extraction of the information bearing signal (e.g.,  
demodulation) more difficult. In the current embodiment, a  
pilot tone operating at 119.775 MHz (approximately 120 MHz)  
may be generated at each central office and transmitted on  
the downstream optical bandwidth along with the CATV  
channels. Such a pilot tone is used in most cable TV  
systems for balancing and testing purposes. At the  
subscriber premises (e.g., customer home or other  
termination of the system), an interface circuit or box may  
be provided to separate out all of the video, data and POTS  
channels. At this point, the 120 MHz pilot tone will be

filtered out, amplified, and provided to the upstream and downstream divider circuits.

As shown in Figure 9 (which, recall, is used for data transmissions from the central office to the subscriber), an approximately 120 MHz pilot tone 902 may be provided to an exemplary central office RF combiner 125' after having been divided by three. Similarly, an approximately 120 MHz pilot tone 926 may be provided to an exemplary subscriber receiver 160' (after having been divided by three). As shown in Figure 10 (which, recall, is used for data transmissions from the subscriber to the central office), an approximately 120 MHz pilot tone 1002 may be provided to an exemplary subscriber RF combiner 170' (after having been divided by two). Similarly, an approximately 120 MHz pilot tone 1026 may be provided to an exemplary central office receiver 140' (after having been divided by two).

The upstream (e.g., subscriber to central office) circuit may include a ripple counter, which includes a string of divide-by-two (e.g., multi-vibrator) circuits. This ripple counter may provide the following frequencies:

SERVICE\CHARACTERISTICS	CHANNEL BANDWIDTH (MHz)	APPROXIMATE CARRIER FREQUENCY (MHz)	ACTUAL CARRIER FREQUENCY (MHz)
WIDE BAND DATA	10	60	59.8875
WIDE BAND DATA OR DIGITAL VIDEO	10	30	29.94375
DIGITAL OR ANALOG VIDEO	6	15	14.971875
DATA	2	7.5	7.485938
DATA OR MUSIC	1	3.75	3.742969
DATA OR MUSIC	0.5	1.875	1.871484
LOW SPEED DATA OR POTS	0.10	0.9375	0.935742
LOW SPEED DATA OR POTS	0.10	0.46875	0.467871
POTS	0.050	0.234375	0.233936
POTS	0.025	0.117188	0.116968

Figure 10 illustrates such eight-stage ripple counters 1004/1028, one 1004 in the subscriber RF combiner 170' and the other 1028 in the central office receiver 140'. Each of the oscillator (e.g., carrier) signals from the eight-stage ripple counter 1004 may be mixed with a particular service data signal (if selected) at mixer 1006. The mixer 1006 actually includes a plurality of mixers, each of the mixers corresponding to a given data channel, and is therefore referred to as "mixers 1006" below. (Note that there may be less upstream services than downstream services, or at least not necessarily a one-to-one correspondence between the downstream and upstream services supported.) The oscillator signals as modulated by the data service signals (also referred to as "mixed signals") are then combined by combiner 1008, converted from an electrical signal to an optical signal by transmitter 1030 and provided on the communications medium 101'. At the central office, an optical to electrical receiver 1040

accepts the optical signal from the communications medium 101' and provides an electrical signal to (eight-way) power splitter 1022 which provides the selected signals to mixer (e.g., demodulator) 1024. The mixer 1024 actually includes a plurality of mixers, each of the mixers corresponding to a given data channel, and is therefore referred to as "mixers 1024" below. A 60 MHz signal (derived by dividing the 120 MHz pilot tone by two (2)) is provided to the (eight-stage) ripple counter 1028 which provides eight (8) oscillator signals to the mixers (e.g., demodulator) 1024. The mixers (e.g., demodulator) 1024 then produce (e.g., extracts) the original selected signal(s).

The downstream (e.g., central office to subscriber) circuit will first divide the 120 MHz pilot by three (3) to generate a 40 MHz tone. That 40 MHz tone will then be provided to a second ripple counter to generate the following frequencies:

SERVICE\CHARACTERISTICS	CHANNEL BANDWIDTH (MHz)	APPROXIMATE CARRIER FREQUENCY (MHz)	ACTUAL CARRIER FREQUENCY (MHz)
WIDE BAND DATA	10	40	39.925
WIDE BAND DATA OR DIGITAL VIDEO	10	20	19.9625
DIGITAL OR ANALOG VIDEO	6	10	9.98125
DATA	2	5	4.990625
DATA OR MUSIC	1	2.5	2.495313
DATA OR MUSIC	0.5	1.25	1.247656
LOW SPEED DATA OR POTS	0.10	0.625	0.623828
LOW SPEED DATA OR POTS	0.10	0.3125	0.311914
POTS	0.050	0.15625	0.155957
POTS	0.025	0.078125	0.0779785

Figure 9 illustrates such eight-stage ripple counters 904/928, one 904 in the central office RF combiner 125' and the other 928 in the subscriber receiver 160'. Each of the oscillator (e.g., carrier) signals from the (eight-stage) ripple counter 904 may be mixed with a particular service data signal (if selected) at mixer 906. The mixer 906 actually includes a plurality of mixers, each of the mixers corresponding to a given data channel, and is therefore referred to as "mixers 906" below. The oscillator signals as modulated by the data service signals ("mixed signals") are then combined by (an eight-way) combiner 908, converted from an electrical signal to an optical signal by transmitter 930 and provided on the communications medium 101'. At the subscriber, an optical to electrical receiver 940 accepts the optical signal from the communications medium 101' and provides an electrical signal to (e.g., eight-way) power splitter 922 which provides the selected ones of the signals to mixer (e.g., demodulator) 924. The mixer 924 actually includes a plurality of mixers, each of the mixers corresponding to a given data channel, and is therefore referred to as "mixers 924" below. A 40 MHz signal (derived by dividing the 120 MHz pilot tone by three (3)) is provided to the (eight-stage) ripple counter 928 which provides (eight (8)) oscillator signals to the mixers (e.g., demodulator) 924. The mixer (e.g., demodulator) then produces (extracts) the selected ones of the original signals.

The upstream and downstream frequencies set forth in the Tables above, were selected to efficiently use the

available bandwidth. Figure 11 illustrates the upstream and downstream oscillator (e.g., carrier or modulation) frequencies. The downstream oscillator frequencies are indicated above the dashed line, while upstream oscillator frequencies are indicated below the dashed line. The upstream bandwidth can actually be as high as 300 MHz without adverse effects. Note also that the higher frequency local oscillators will typically be used for broader bandwidth services. This is because less and less bandwidth is available about oscillator frequencies as the frequencies of such oscillators are divided.

All of the local oscillator frequencies generated by these counter/divider circuits may be square waves which may be advantageous when the local oscillator is used as an input to an associated one of a plurality of doubly balanced mixers (This type of mixer suppresses the carrier frequency, generating only the upper and lower sideband signals.). More specifically, in each case, a square waveform may quickly saturate the diodes of such a doubly balanced mixer. The output of such a doubly balanced mixer is a double sideband signal (carrier frequency is suppressed). After proper filtering, this double sideband signal provides the single sideband signal used in this exemplary application and system.

Further, using the 120 MHz pilot tone provides a series of local oscillators that are coherent across the entire system. Such coherency minimizes or eliminates beat tone(s) (i.e., spurious signals) which would otherwise

occur if the local oscillators were not coherent (i.e., unwanted additional sidebands would be generated otherwise). In this way, the carrier frequencies can be suppressed, thereby saving power, without the disadvantages normally associated with carrier suppression.

Furthermore, if the 120 MHz pilot tone is derived from a low noise source, then all of the local oscillators will be inherently low noise. Indeed, each time the pilot tone is divided by two, the phase noise may be reduced by 6 dB. For example, the 15 MHz local oscillator of the upstream system may have its phase noise reduced by 18 dB from that of the 120 MHz pilot tone (i.e.,  $120/2 = 60/2 = 30/2 = 15$  for 6 dB + 6 dB + 6 dB = 18 dB phase noise reduction).

In view of the foregoing, this embodiment generates local oscillator signals that are cleaner (e.g., less phase noise), cheaper to produce, and having a smaller footprint.

## 2.5 Components of the Preferred Embodiment of System 100

In a preferred embodiment of system 100, laser 130 is a distributed feedback (DFB) laser, such as the A371 series laser module manufactured by Lucent Technologies; laser 130 operates at a low-powered (e.g., about 2 mW) and exhibits a linearity characteristic suitable for propagating optical signals over the bandwidth from 5-1000 MHz. Laser 165 may be of the same type as laser 130, although the requirements on laser 165 are not as rigorous as those of laser 130 because laser 165 operates over a narrower bandwidth. WDD/WDM 135 and 155 are available as standard optical components. Each crosspoint of switch 115 may be realized by a micromechanical electrical switch (MEMS) such as available from the Rockwell Corporation. RF combiners 125 and 170 are conventional components available from Jerrold Electronics.

## 3.0 Relation Between Optical and Electrical Switching Aspects of the Embodiments

As stated in Section 1.0, optical band 01 is preferably utilized for bi-directional data communication between the central office and the subscriber premises. With reference to this operational mode, it was further stated in Section 1.0 that the subscriber premises includes a laser transmitter for modulating upstream information onto unmodulated wavelengths of optical band 01, and that the two-way data link can be utilized by a computer, fax machine, telephone, or modem.



Section 2.0 sets forth in detail, particularly with respect to FIG. 5, how bi-directional communication can readily be effected using one optical wavelength for downstream propagation of 'telephony-D', 'narrowband-D', ..., and other optical wavelength for upstream propagation of 'telephony-U', 'narrowband-U', ..., which are the counter parts to the former signals. It is readily apparent to one of the ordinary skill in the art that the more detailed description with respect to FIG. 5 is equally applicable to the description of FIG. 4 wherein the bi-directional aspect of the optical switching aspect of the present invention was also described for the optical switching embodiment.

The invention having thus described with particular reference to the preferred forms thereof, it will be obvious that various changes and modifications may be made therein without departing from the spirit and scope of the invention as defined in the appended claims.

WHAT IS CLAIMED IS:

1 1. A method for communicating at least two source signals  
2 from a first location toward a second location, the method  
3 comprising:

- 4 a) generating a local oscillator signal for each of  
5 the at least two source signals;  
6 b) selecting signals from among the at least two  
7 source signals to define selected source signals;  
8 c) separately mixing each of the selected source  
9 signals with a corresponding local oscillator signal  
10 to generate mixed selected signals;  
11 d) combining the mixed selected signals to generate a  
12 transmission signal; and  
13 e) transmitting the transmission signal towards the  
14 second location.

1 2. The method of claim 1 further comprising:

- 2 - converting the transmission signal to an optical  
3 signal before transmitting the transmission signal  
4 towards the second location.

1 3. The method of claim 1 wherein the act of generating a  
2 local oscillator signal for each of the at least two source  
3 signals includes:

- 4 i) accepting a pilot carrier;  
5 ii) generating a first local oscillator signal  
6 based on the pilot carrier; and

7           iii) generating an  $n^{\text{th}}$  local oscillator signal by  
8           dividing the first local oscillator signal by  
9            $2^{n-1}$ .

1   4. The method of claim 3 wherein the pilot carrier has a  
2   frequency of approximately 120 MHz.

1   5. The method of claim 3 wherein the act of generating a  
2   first local oscillator signal based on the pilot carrier is  
3   performed by dividing the pilot carrier by a selected one  
4   of two and three.

1   6. The method of claim 3 wherein the each of the local  
2   oscillator signals has a square waveform.

1   7. The method of claim 3 wherein the  $n^{\text{th}}$  local oscillator  
2   signal has less noise than the  $(n-1)^{\text{th}}$  local oscillator  
3   signal.

1   8. The method of claim 3 wherein the one of the at least  
2   two source signals associated with the  $n^{\text{th}}$  local oscillator  
3   signal requires less bandwidth than the one of the at least  
4   two source signals associated with the  $(n-1)^{\text{th}}$  local  
5   oscillator signal.

1   9. A method for communicating at least two source signals  
2   from a first location to a second location, the method  
3   comprising:

- 4       a) generating a source local oscillator signal for
- 5       each of the at least two source signals;
- 6       b) selecting signals from among the at least two
- 7       source signals to define selected source signals;

8 c) separately mixing each of the selected source  
9 signals with a corresponding source local oscillator  
10 signal to generate mixed selected signals;  
11 d) combining the mixed selected signals to generate a  
12 transmission signal;  
13 e) transmitting the transmission signal to the second  
14 location;  
15 f) receiving the transmitted transmission signal at  
16 the second location;  
17 g) splitting the received transmission signal to  
18 generate mixed selected signals;  
19 h) generating a destination local oscillator signal  
20 for each of the at least two source signals;  
21 i) separately demodulating each of the mixed selected  
22 signals using corresponding ones of the destination  
23 local oscillator signals, to generate the selected  
24 source signals.

1 10. The method of claim 9 further comprising:

- 2 - converting the transmission signal to an optical
- 3 signal before transmitting the transmission signal
- 4 towards the second location; and
- 5 - converting the received transmission signal to an
- 6 electrical signal before splitting it.

1 11. The method of claim 9 wherein the act of generating a  
2 source local oscillator signal for each of the at least two  
3 source signals includes:

- 4 i) accepting a pilot carrier;
- 5 ii) generating a first source local oscillator
- 6 signal based on the pilot carrier; and



12 oscillator signals, to generate the selected source  
13 signals.

1 15. The method of claim 14 further comprising:

2 - converting the received transmitted signal to an  
3 electrical signal before it is split.

1 16. The method of claim 14 wherein the act of generating a  
2 local oscillator signal for each of the at least two source  
3 signals includes:

4 i) accepting a pilot carrier;  
5 ii) generating a first local oscillator signal  
6 based on the pilot carrier; and  
7 iii) generating an  $n^{\text{th}}$  local oscillator signal by  
8 dividing the first local oscillator signal by  
9  $2^{n-1}$ .

1 17. The method of claim 16 wherein the pilot carrier has a  
2 frequency of approximately 120 MHz.

1 18. The method of claim 16 wherein the act of generating a  
2 first local oscillator signal based on the pilot carrier is  
3 performed by dividing the pilot carrier by a selected one  
4 of two and three.

1 19. The method of claim 16 wherein the each of the local  
2 oscillator signals has a square waveform.

1 20. The method of claim 16 wherein the  $n^{\text{th}}$  local oscillator  
2 signal has less noise than the  $(n-1)^{\text{th}}$  local oscillator  
3 signal.

00429900-642990

1 21. The method of claim 16 wherein the one of the at least  
2 two source signals associated with the  $n^{\text{th}}$  local oscillator  
3 signal requires less bandwidth than the one of the at least  
4 two source signals associated with the  $(n-1)^{\text{th}}$  local  
5 oscillator signal.

1 22. A transmitter for transmitting selected ones of at  
2 least two source signals, the transmitter comprising:

- 3 a) an  $n$ -stage ripple counter for generating a local  
4 oscillator signal for each of the at least two source  
5 signals;
- 6 b) a selector for selecting signals from among the at  
7 least two source signals to define selected source  
8 signals;
- 9 c) a plurality of mixers, the plurality of mixers
  - 10 i) having a first set of inputs coupled with the  
11 selector for accepting the selected source  
12 signals,
  - 13 ii) having a second set of inputs coupled with  
14 the  $n$ -stage ripple counter for accepting the  
15 local oscillator signals,
  - 16 iii) being adapted to separately mix each of the  
17 selected source signals with a corresponding one  
18 of the local oscillator signals to generate mixed  
19 selected signals, and
  - 20 iv) having a set of outputs for providing the  
21 mixed selected signals; and
- 22 d) an  $n$ -way combiner, the  $n$ -way combiner having a set  
23 of inputs coupled with the set of outputs of the  
24 mixer, and being adapted to combine the mixed selected  
25 signals to generate a transmission signal.





- 7           iii) having a set of outputs for providing the  
8           mixed selected signals;
- 9       b) an n-stage ripple counter, the n-stage ripple  
10       counter
- 11           i) adapted to generate a local oscillator signal  
12           for each of the at least two source signals, and  
13           ii) having a set of outputs for providing the  
14           local oscillator signals; and
- 15       d) a plurality of mixers, the plurality of mixers
- 16           i) having a first set of inputs coupled with the  
17           set of outputs of the n-way splitter,  
18           ii) having a second set of inputs coupled with  
19           the set of outputs of the n-stage ripple counter,  
20           and  
21           iii) adapted to separately demodulate each of  
22           the mixed selected signals at its first second of  
23           inputs using corresponding ones of the second  
24           local oscillator signals at its second set of  
25           inputs, to generate the selected source signals.

1   29. The receiver of claim 28 wherein the n-stage ripple  
2   counter is adapted to:

- 3           i) generate a first local oscillator signal  
4           based on a pilot carrier; and  
5           ii) generate an  $n^{\text{th}}$  local oscillator signal by  
6           dividing the first local oscillator signal by  
7            $2^{n-1}$ .

1   30. The receiver of claim 29 wherein the pilot carrier has  
2   a frequency of approximately 120 MHz.

1 31. The receiver of claim 29 wherein the each of the local  
2 oscillator signals generated by the n-stage ripple counter  
3 has a square waveform.

1 32. The receiver of claim 29 wherein n-stage ripple  
2 counter generates the  $n^{\text{th}}$  local oscillator signal with less  
3 noise than the  $(n-1)^{\text{th}}$  local oscillator signal.

1 33. The receiver of claim 29 wherein the one of the at  
2 least two source signals associated with the  $n^{\text{th}}$  local  
3 oscillator signal requires less bandwidth than the one of  
4 the at least two source signals associated with the  $(n-1)^{\text{th}}$   
5 local oscillator signal.

1 34. A method for communicating at least two downstream  
2 signals from a first location to a second location and for  
3 communicating at least two upstream signals from the second  
4 location to the first location, the method comprising:

- 5 a) generating a downstream source local oscillator  
6 signal for each of the at least two downstream  
7 signals;
- 8 b) selecting signals from among the at least two  
9 downstream signals to define selected downstream  
10 signals;
- 11 c) separately mixing each of the selected downstream  
12 signals with a corresponding downstream source local  
13 oscillator signal to generate mixed selected  
14 downstream signals;
- 15 d) combining the mixed selected downstream signals to  
16 generate a downstream transmission signal;
- 17 e) transmitting the downstream transmission signal to  
18 the second location;

- f) receiving the transmitted downstream transmission signal at the second location;
- g) splitting the received downstream transmission signal to generate mixed selected downstream signals;
- h) generating a downstream destination local oscillator signal for each of the at least two downstream signals;
- i) separately demodulating each of the mixed selected downstream signals using corresponding ones of the downstream destination local oscillator signals, to generate the selected downstream signals;
- j) generating an upstream source local oscillator signal for each of the at least two upstream signals;
- k) separately mixing each of the upstream signals with a corresponding source upstream local oscillator signal to generate mixed upstream signals;
- l) combining the mixed upstream signals to generate an upstream transmission signal;
- m) transmitting the upstream transmission signal to the first location;
- n) receiving the transmitted upstream transmission signal at the first location;
- o) splitting the received upstream transmission signal to generate mixed upstream signals;
- p) generating a upstream destination local oscillator signal for each of the at least two upstream signals; and
- q) separately demodulating each of the mixed upstream signals using corresponding ones of the upstream destination local oscillator signals, to generate the upstream signals.

1 35. The method of claim 34 further comprising:  
2 - converting the downstream transmission signal to a  
3 first optical signal before transmitting the  
4 transmission signal towards the second location; and  
5 - converting the upstream transmission signal to a  
6 second optical signal before transmitting the  
7 transmission signal towards the first location,  
8 wherein the first and second optical signals have  
9 different wavelengths.

1 36. The method of claim 34 wherein the act of generating a  
2 downstream source local oscillator signal for each of the  
3 at least two downstream signals includes:

- 4 i) accepting a pilot carrier;
- 5 ii) generating a first downstream source local
- 6 oscillator signal by dividing the pilot carrier
- 7 by a first number; and
- 8 iii) generating an  $n^{\text{th}}$  downstream source local
- 9 oscillator signal by dividing the first
- 10 downstream source local oscillator signal by  $2^{n-1}$ ,

11 wherein the act of generating a downstream destination  
12 local oscillator signal for each of the at least two source  
13 signals includes:

- 14 i) accepting the pilot carrier;
- 15 ii) generating a first downstream destination
- 16 local oscillator signal by dividing the pilot
- 17 carrier by the first number; and
- 18 iii) generating an  $n^{\text{th}}$  downstream destination
- 19 local oscillator signal by dividing the first
- 20 downstream destination local oscillator signal by
- 21  $2^{n-1}$ ,

22 wherein the act of generating an upstream source local  
23 oscillator signal for each of the at least two upstream  
24 signals includes:

- 25 i) accepting the pilot carrier;
- 26 ii) generating a first upstream source local  
27 oscillator signal by dividing the pilot carrier  
28 by a second number, the second number being  
29 different from the first number; and
- 30 iii) generating an  $n^{\text{th}}$  upstream source local  
31 oscillator signal by dividing the first upstream  
32 source local oscillator signal by  $2^{n-1}$ , and

33 wherein the act of generating an upstream destination  
34 local oscillator signal for each of the at least two  
35 upstream signals includes:

- 36 i) accepting the pilot carrier;
- 37 ii) generating a first upstream destination  
38 local oscillator signal by dividing the pilot  
39 carrier by the second number; and
- 40 iii) generating an  $n^{\text{th}}$  upstream destination local  
41 oscillator signal by dividing the first upstream  
42 destination local oscillator signal by  
43  $2^{n-1}$ .

1 37. The method of claim 36 wherein the pilot carrier has a  
2 frequency of approximately 120 MHz.

### ABSTRACT

Generating oscillator signals with which selected  
5 signals may be mixed. Such oscillator signals may be  
generated by dividing a pilot tone, such as a 120 MHz pilot  
tone found on many cable TV systems. Oscillator signals  
for demodulating received selected signals may be similarly  
generated.

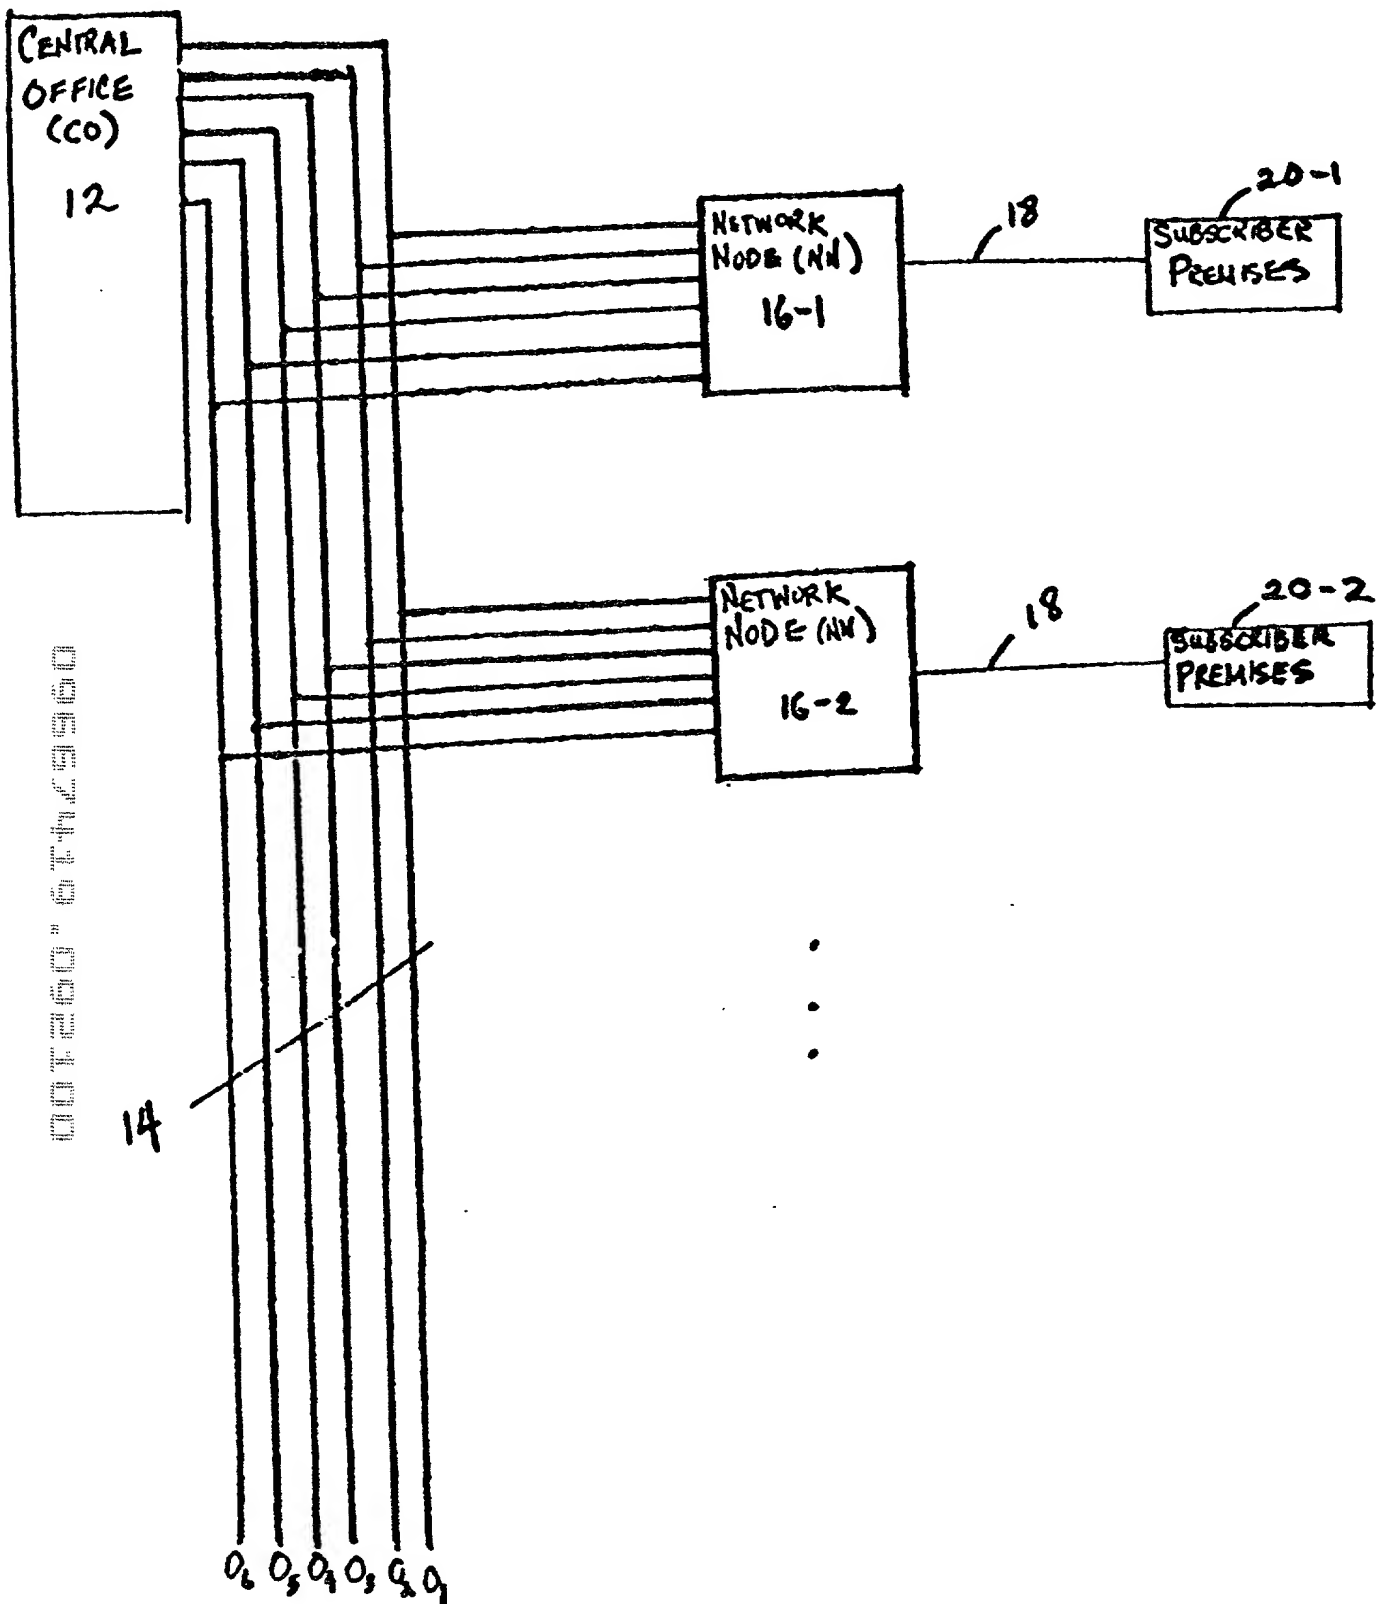


FIGURE 1.

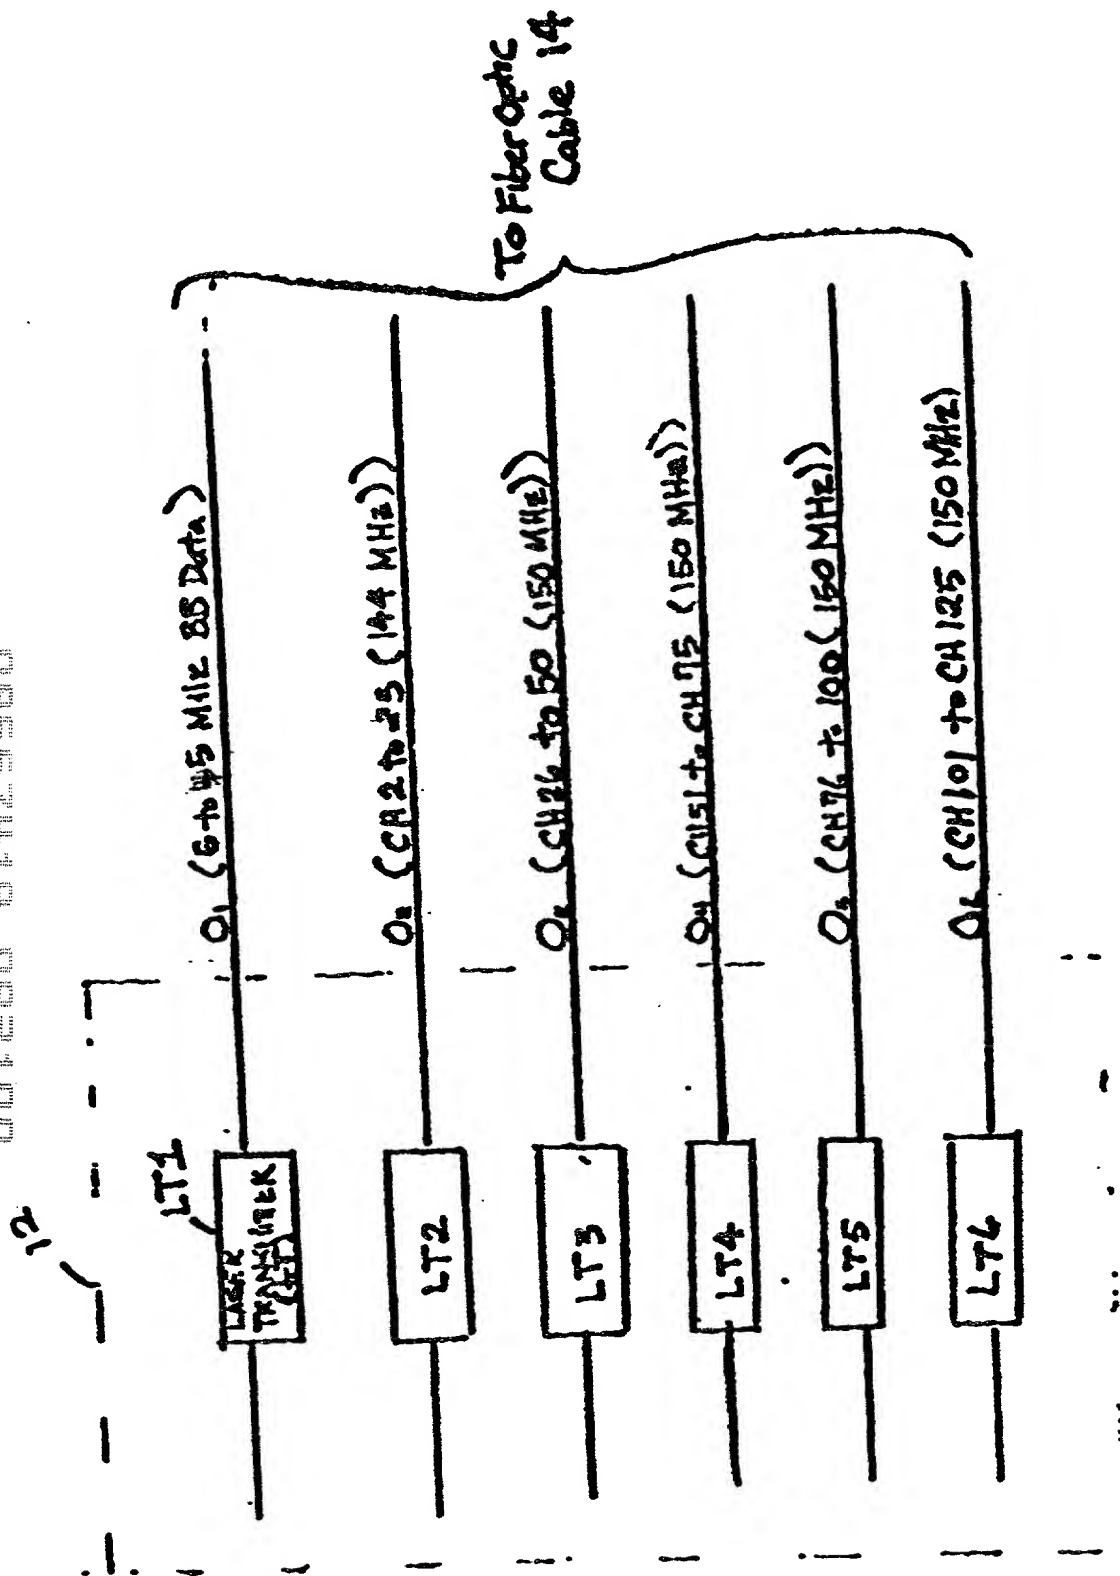


FIGURE 2



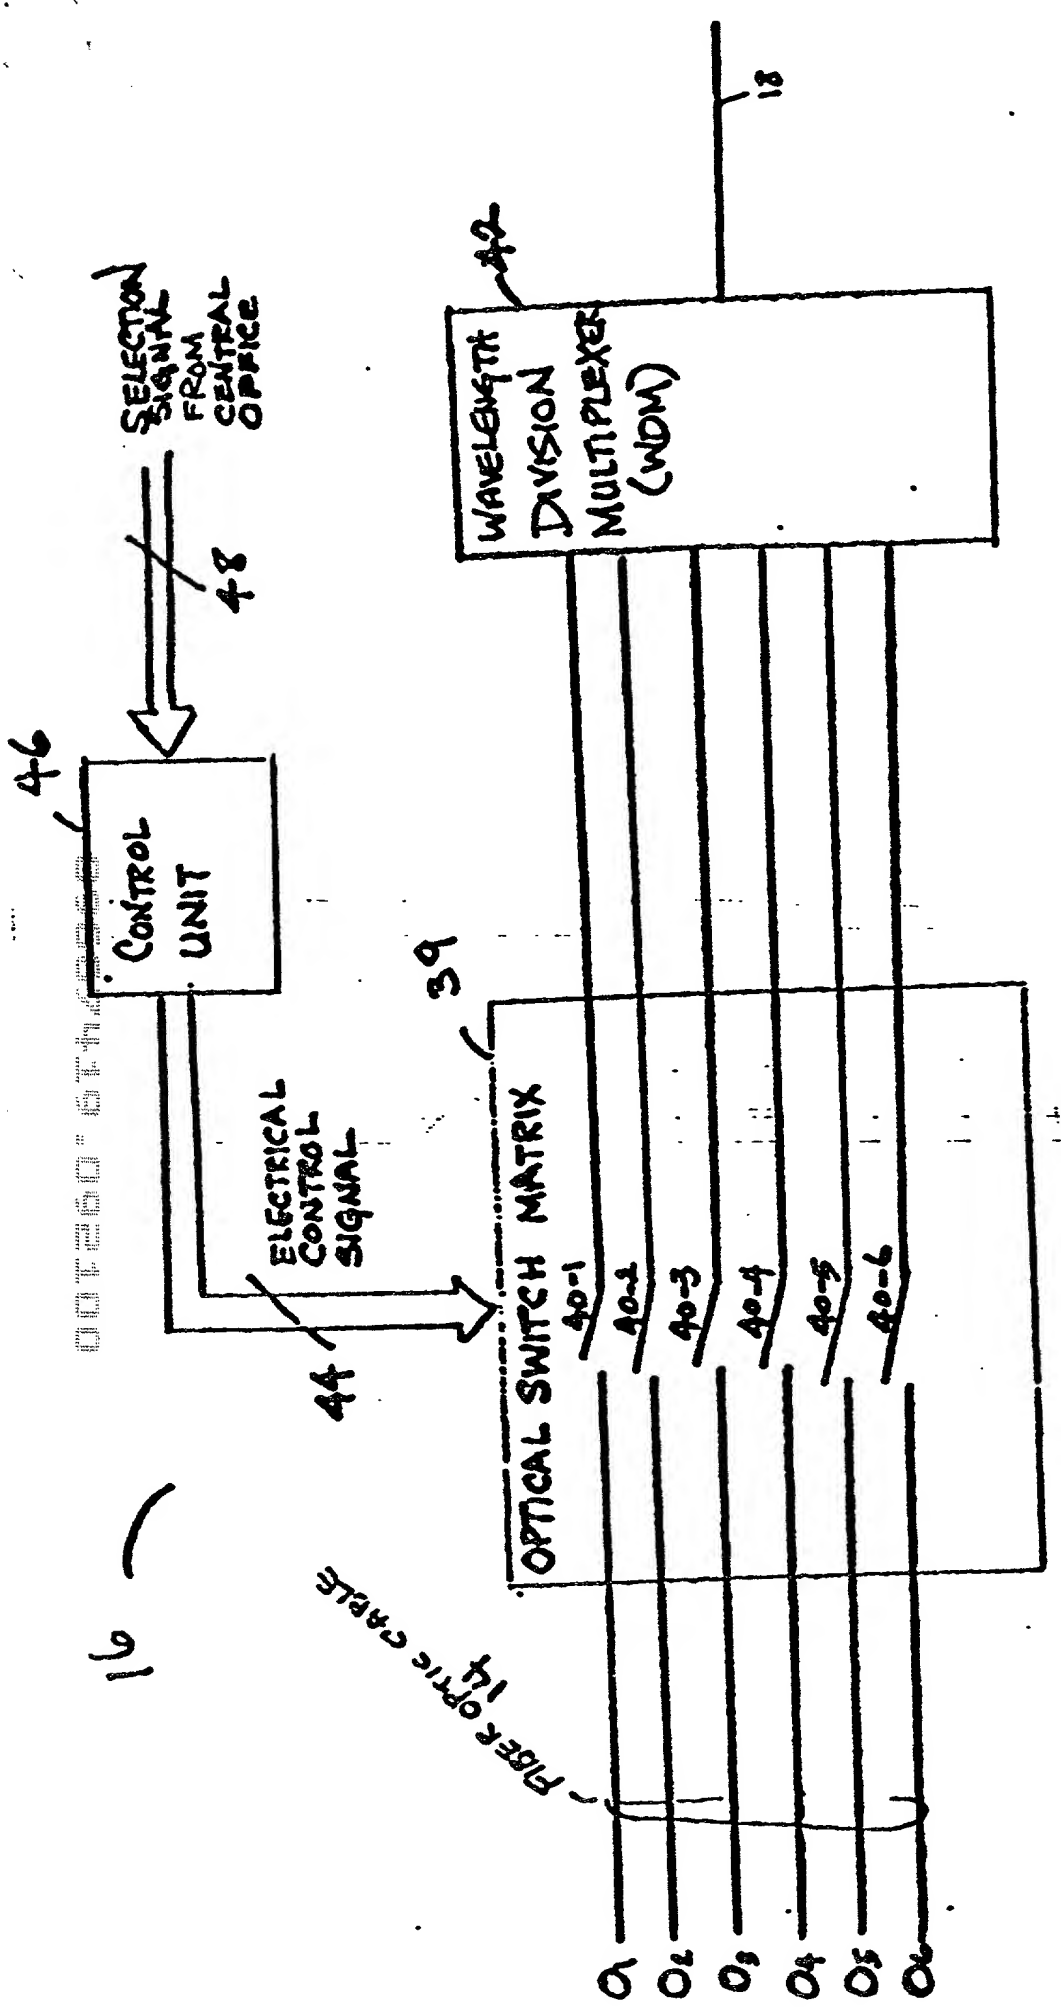


FIGURE 3

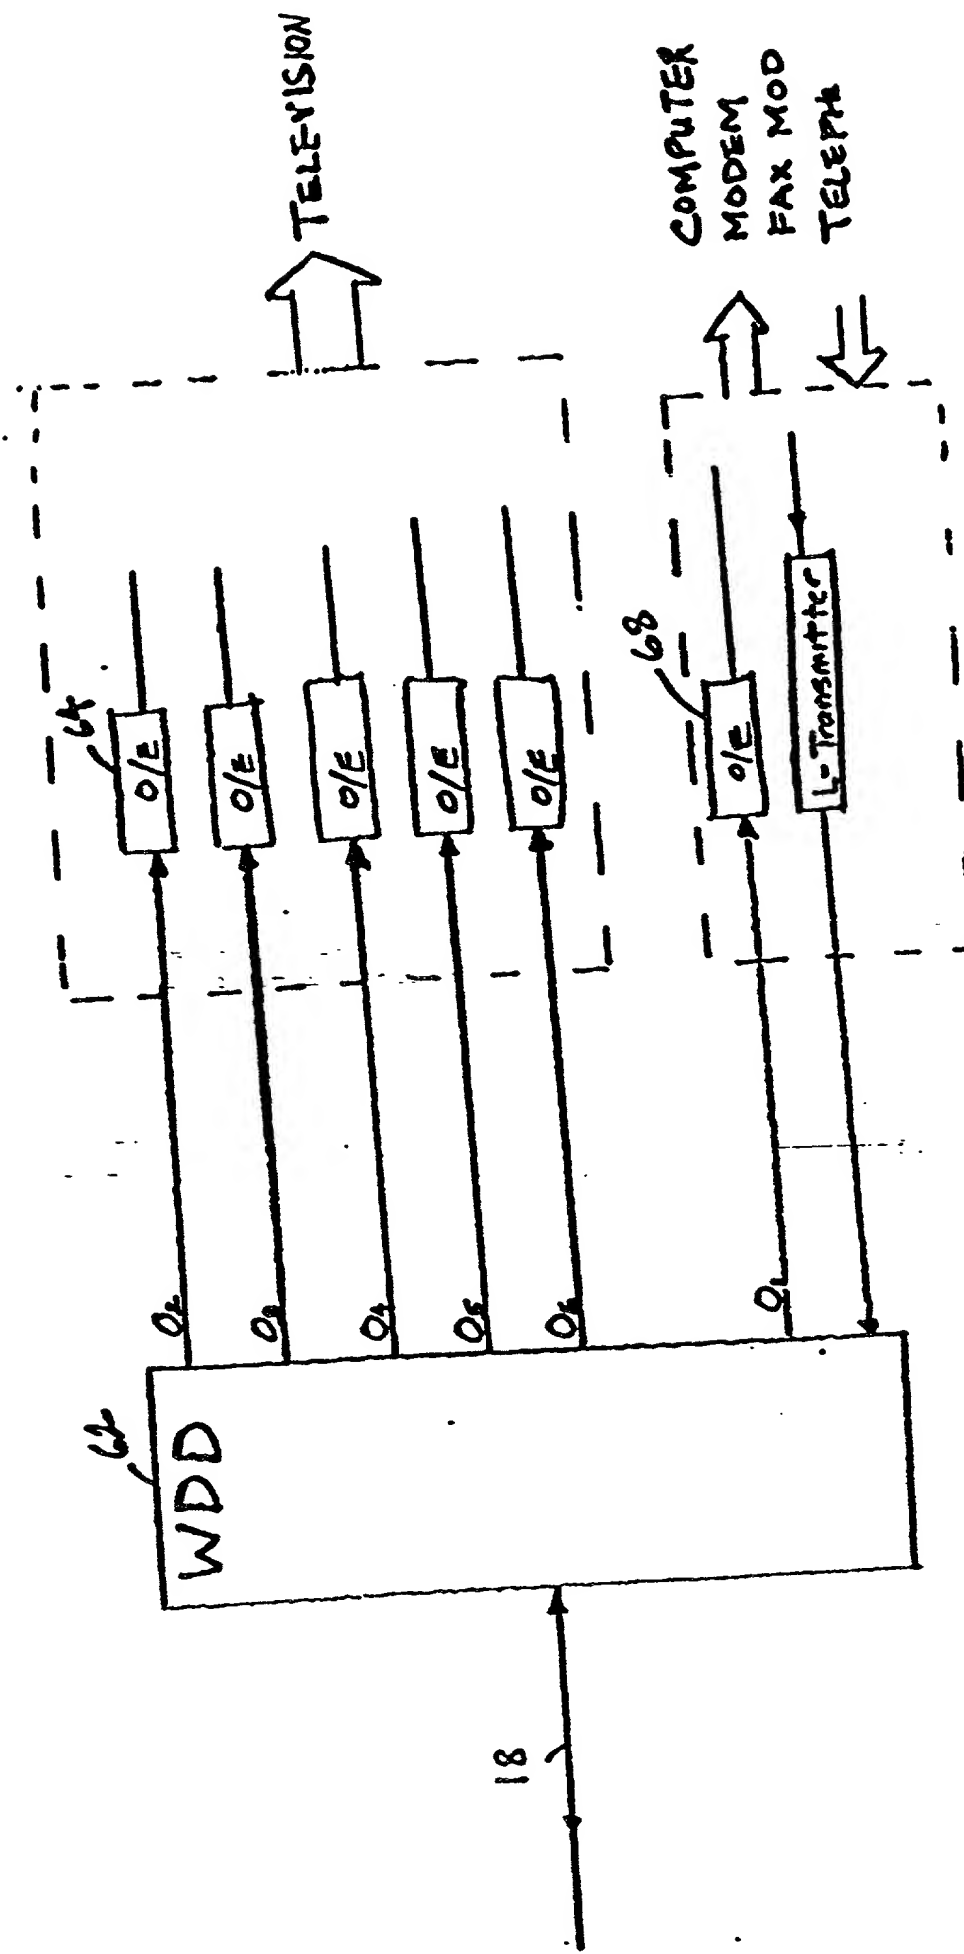


FIGURE 4

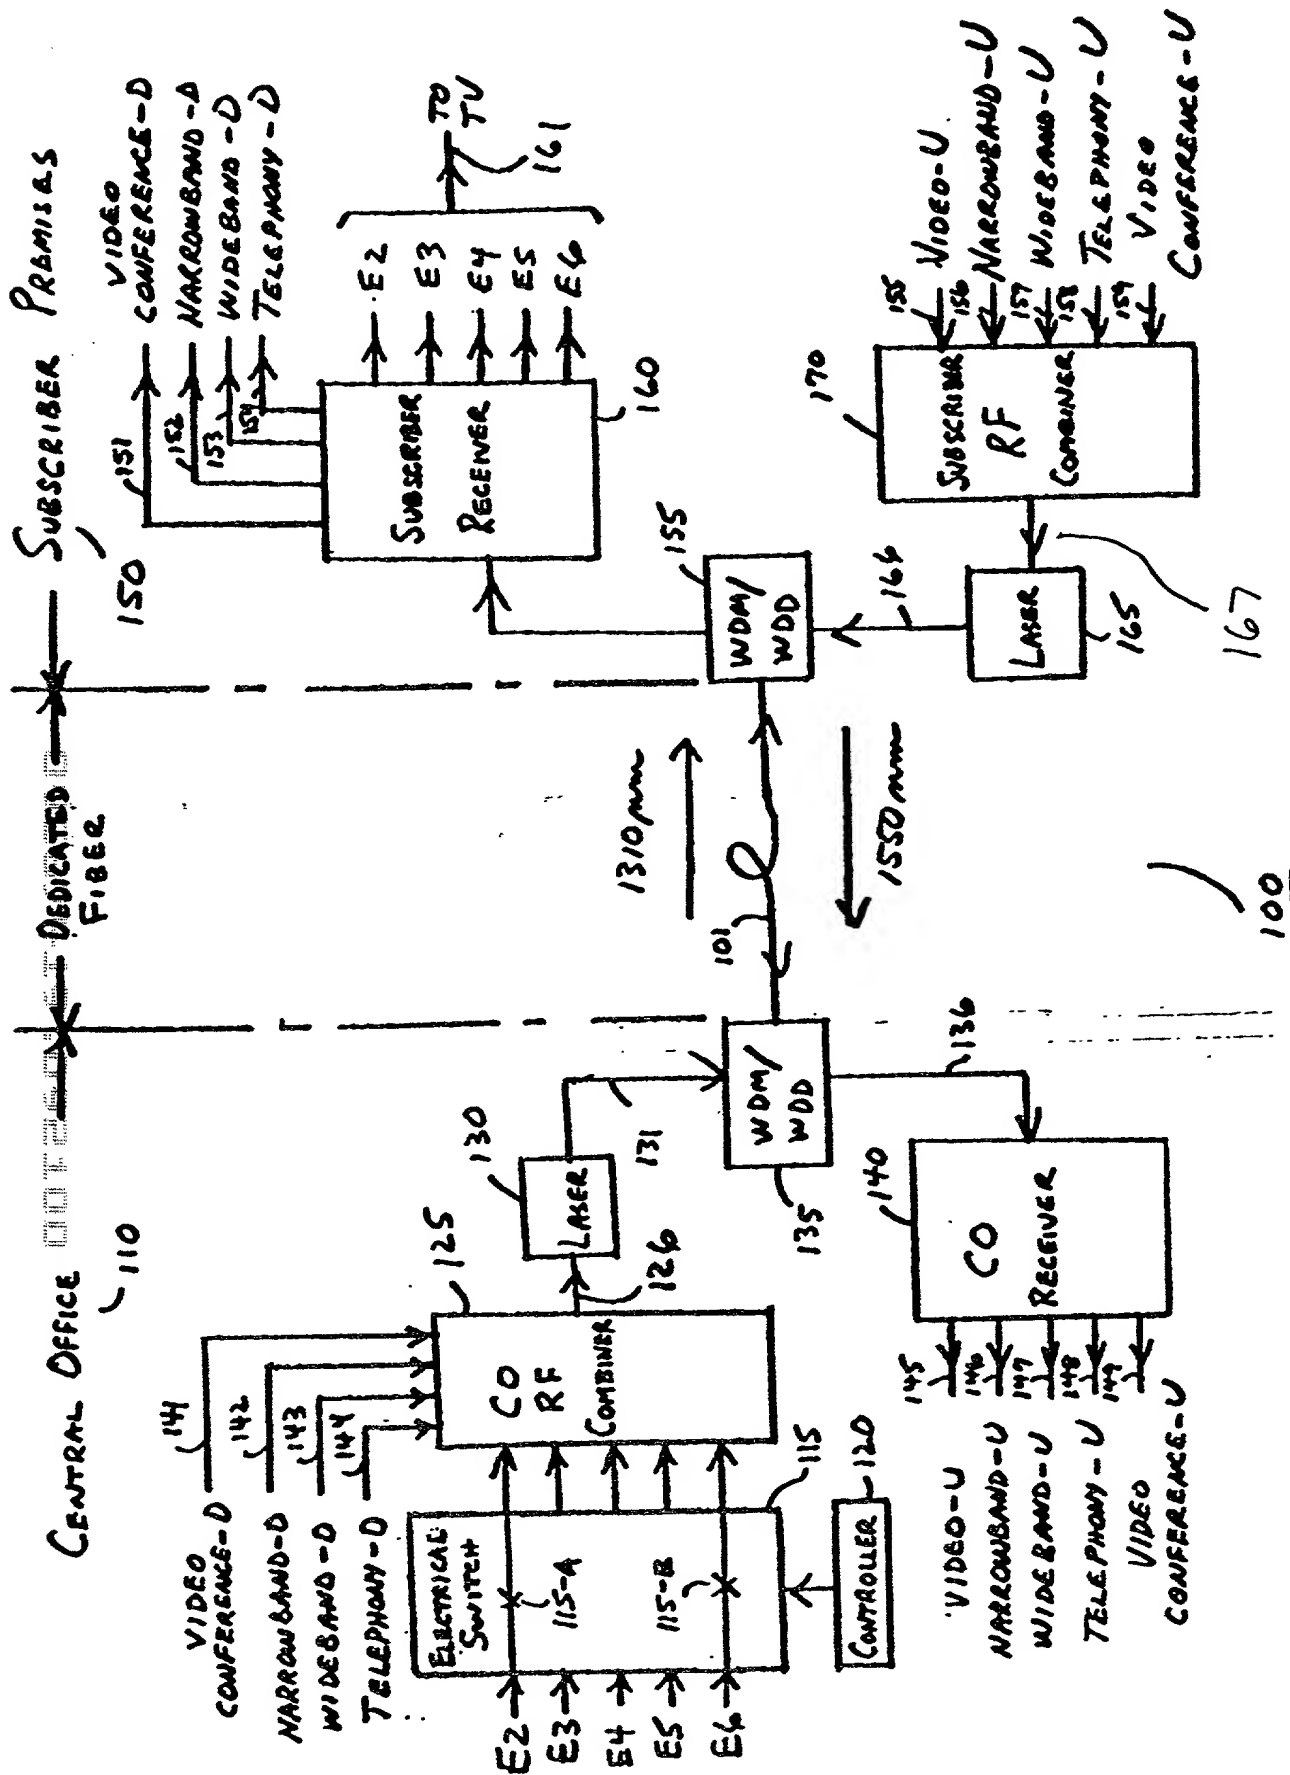


FIG. 5

001260-6THC960



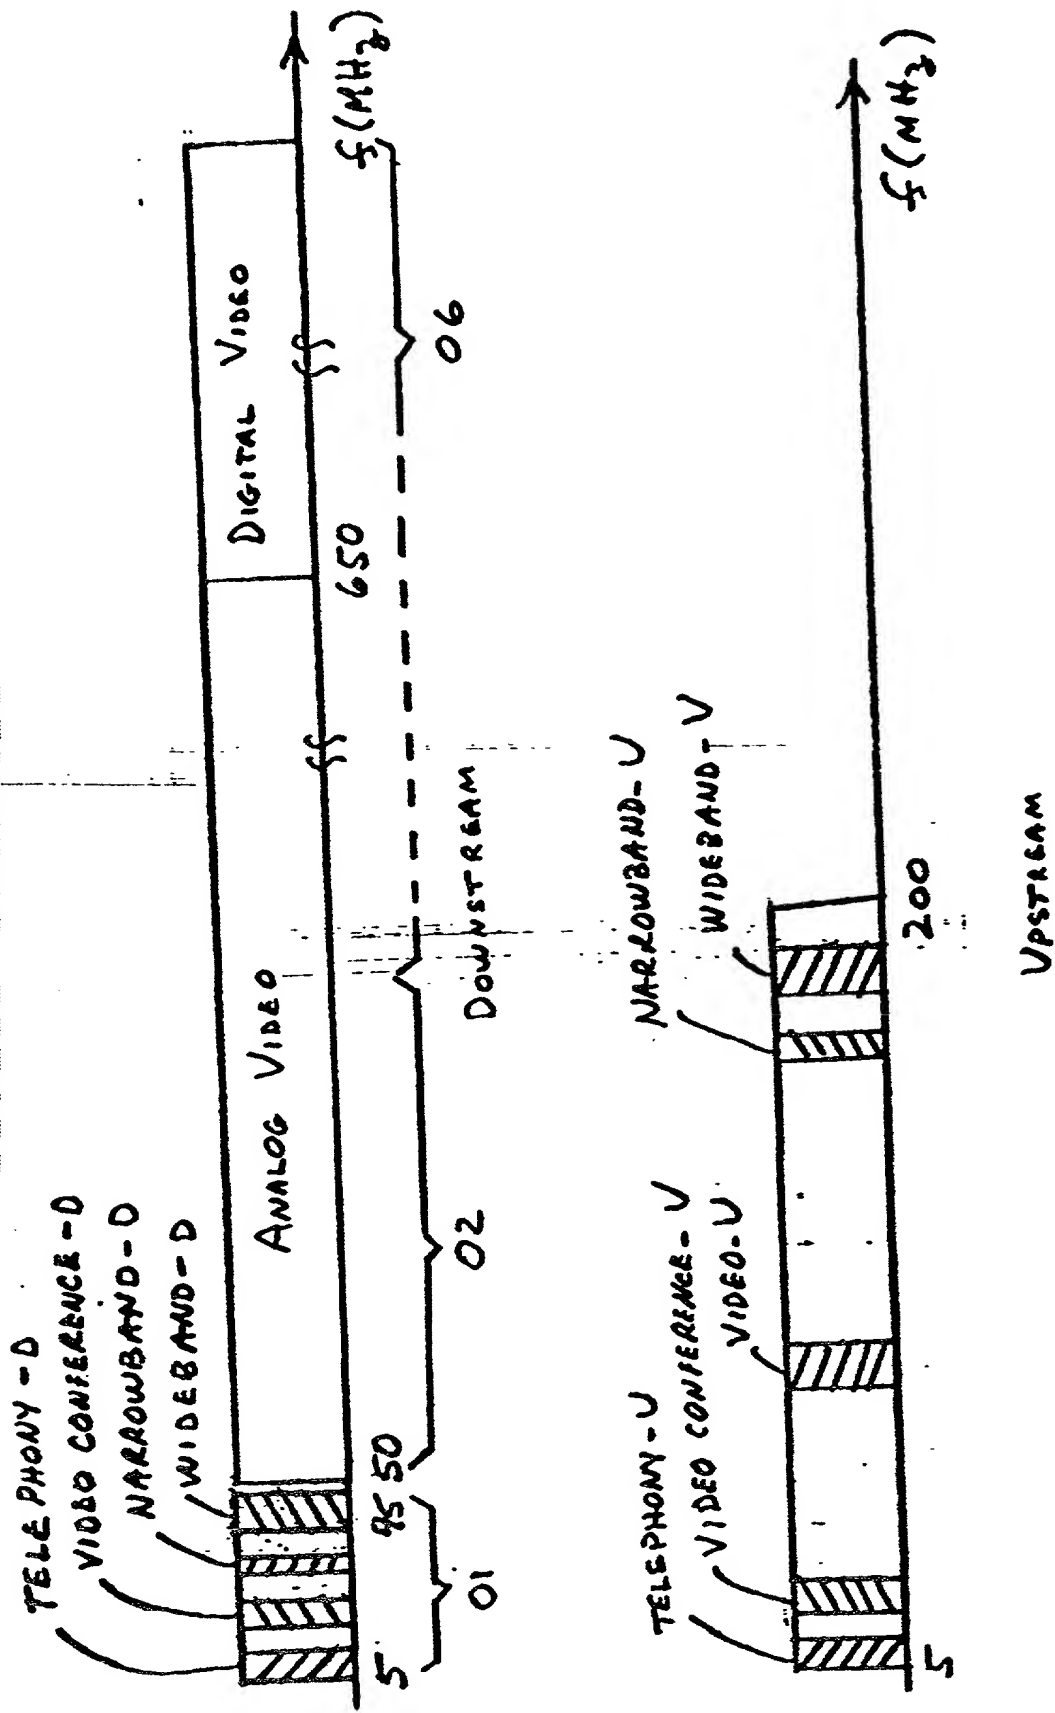


FIG. 6

005649-09100



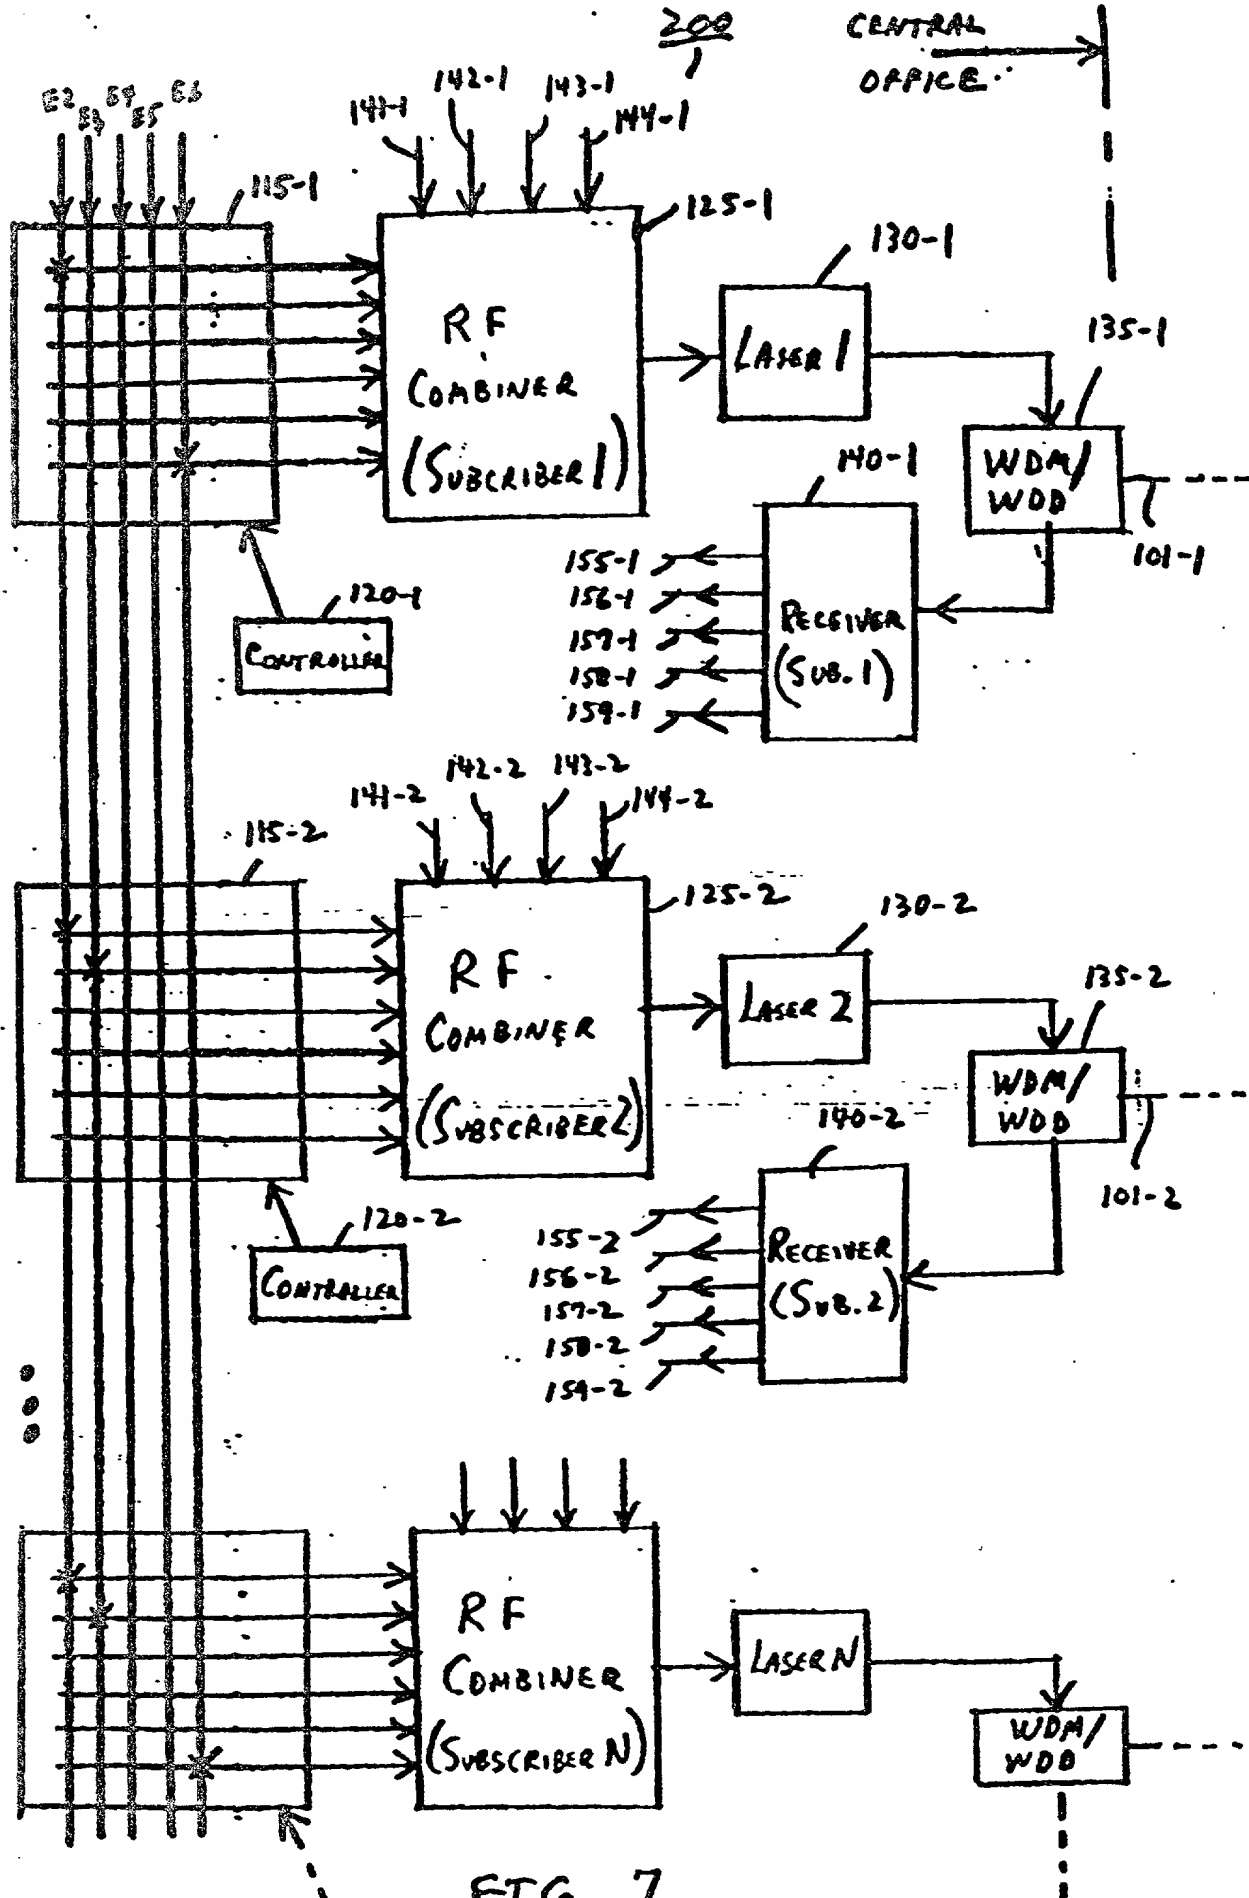

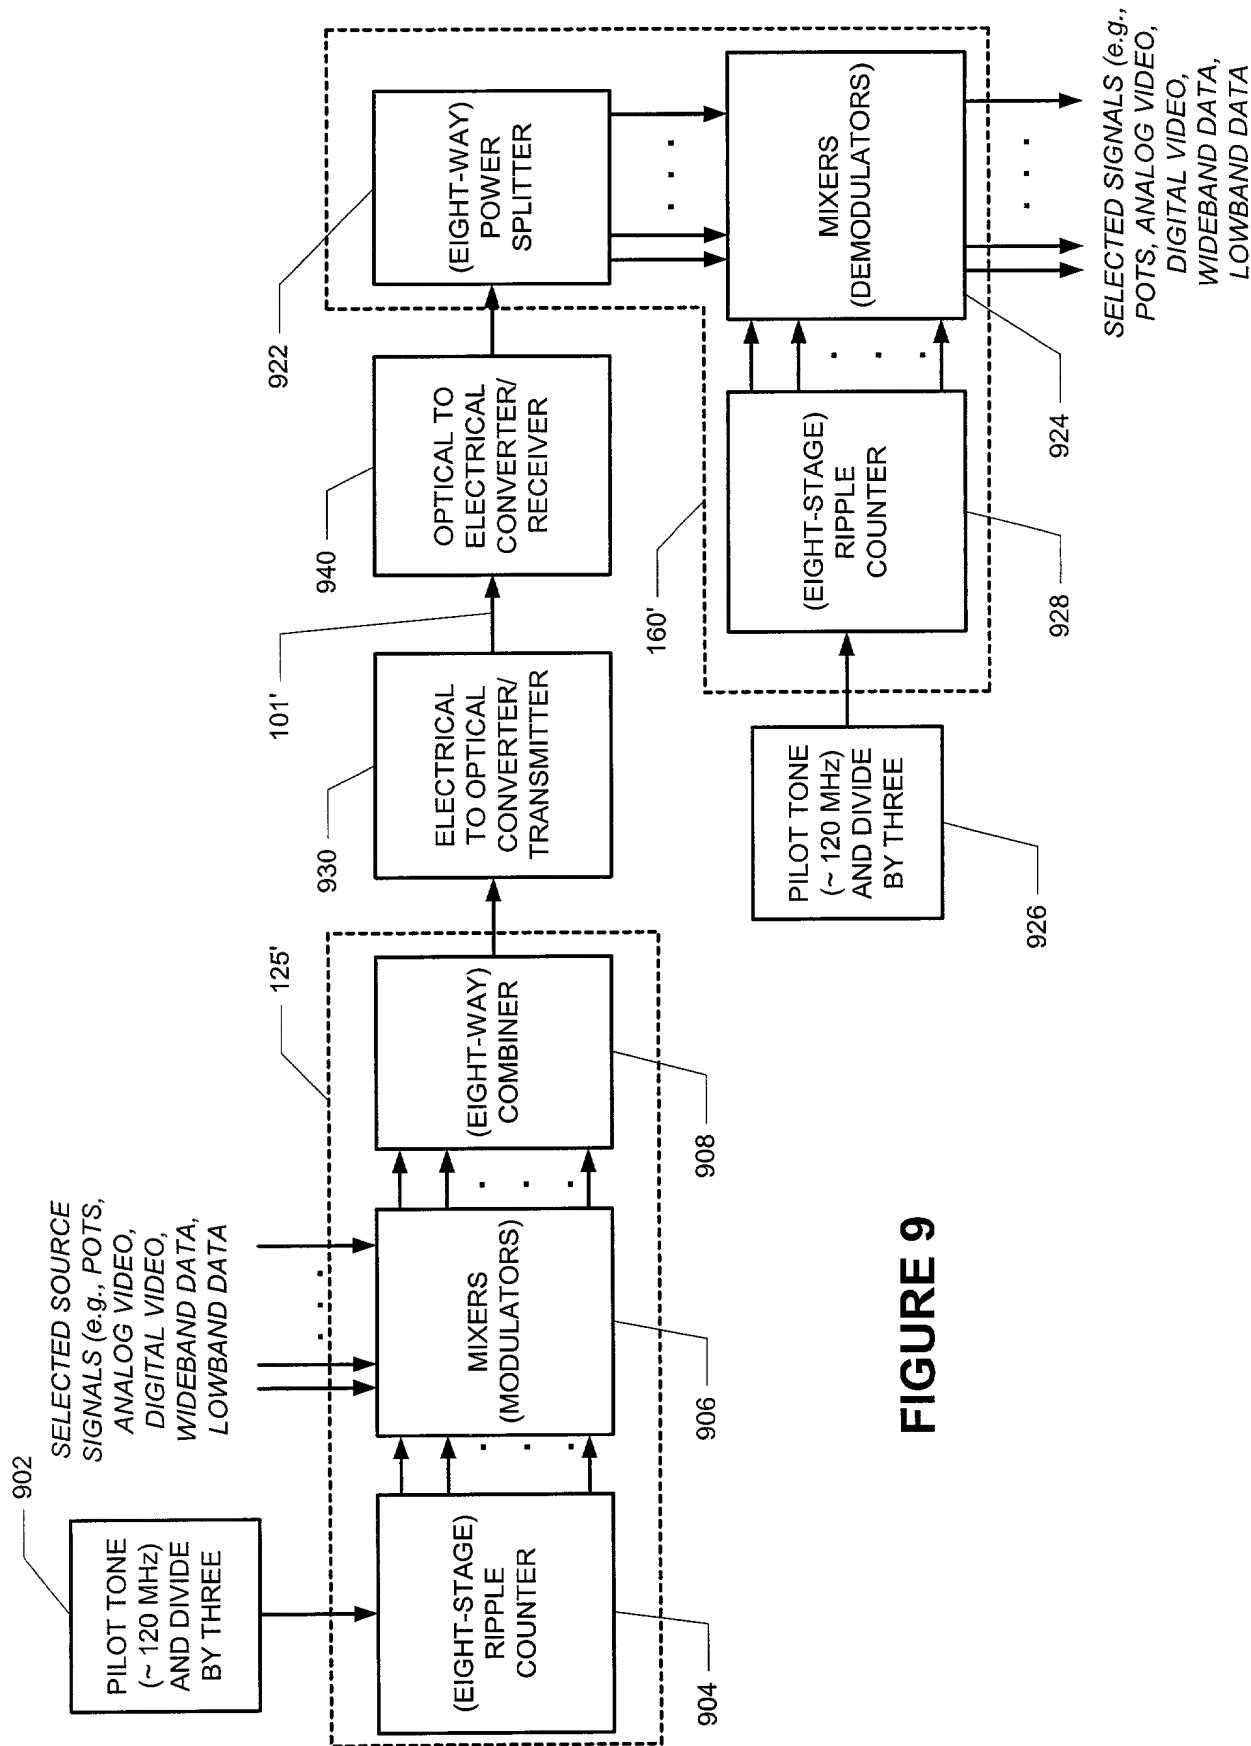







**DECLARATION AND  
POWER OF ATTORNEY**  
(Utility Patent Application)

As a below named inventor, I hereby declare:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which:

☒ is attached hereto

☐ was filed on \_\_\_\_\_ as Application Serial  
No. \_\_\_\_\_ with amendment(s) filed

☐ was filed as PCT international application:  
serial number \_\_\_\_\_ on \_\_\_\_\_  
and was amended under PCT Article 19 on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations section 1.56.

I hereby claim foreign priority benefits under Section 119 of Title 35, United States Code for the above-identified US patent application based on the patent or inventor's certificate identified below and having a filing date before that of the US patent application for which priority is claimed:

<u>Application No.</u>	<u>Country</u>	<u>Filing Date</u>	<u>Priority Claimed</u> <u>under 35 U.S.C. §119</u>
------------------------	----------------	--------------------	--

I hereby claim the benefit under Section 120 and/or Section 119(e) of Title 35 of the United States Code of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by Section 112 of Title 35 of the United States Code, I acknowledge the duty to disclose material information, as defined in Section 1.56 of Title 37 of the Code of Federal Regulations, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application</u>	<u>Serial No.</u>	<u>Filing Date</u>	<u>Status</u>	
			<u>Patented</u>	<u>Pending Abandoned</u>
09/	283,400	April 1, 1999		Pending
08/	806,090	Feb. 25, 1997	6,055,077	
			Patented on April 25, 2000	

Power of attorney:

As a named inventor, I hereby appoint:

John C. Pokotylo (Reg. No. 36,242)  
Michael P. Straub (Reg. No. 36,941)

as my attorneys to prosecute this application and to transact all business in the United States Patent and Trademark Office in connection therewith.

Direct all correspondence to Customer Number IDON601137 at the following address:

STRAUB & POKOTYLO  
1 Bethany Road  
Suite 83, Building 6  
Hazlet, New Jersey 07730.

Direct all telephone calls to: (732) 335-1222.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

First inventor:

Full name: Needle Jacob   
last first middle  
Residence address: 29 McLane Drive  
street  
Dix Hills, New York 11746 USA  
city, state, zip code country  
Post Office address: Same as above  
post office & box number  
city, state, zip code country  
Citizenship: USA  
country  
Signature: Jacob Needle  
Date: Sept 14 - 2000

*Sworn to me this 14<sup>th</sup> day of Sept. 2000*  
*Dina Cozzubbo*

NINA COZZUBBO  
NOTARY PUBLIC, State of New York  
No. 01C04918364  
Qualified in Westchester County  
Commission Expires March 14, 2002